


NOTES:
 1) DRAWING TO BE USED IN CONJUNCTION WITH 'MASTERSPEC' (4211)
 2) WINDOW SYSTEMS REQUIRE SPECIFIC DESIGN DEPENDING ON SPANS, WIND-LOADS, BUILDING CONDITIONS, ETC.
 3) INSIDE GLAZE, INTERNAL REINFORCEMENT AND SEISMIC FRAME OPTIONS AVAILABLE


GLAZING: GLASS THICKNESS TO SUIT REQUIREMENTS
 HARDWARE: STANDARD
 HARDWARE OPTIONS
 FINISHES: POWDER-COAT / ANODISED / PVF²

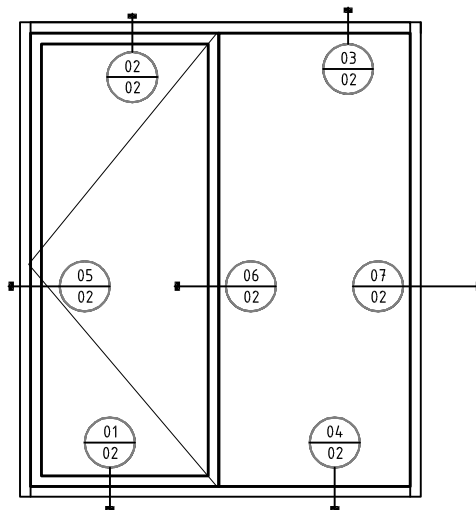

HINGE WINDOW
MULLION JAMB
05
02
1:2


HINGED WINDOW
MULLION
06
02
1:2

FIXED WINDOW
JAMB
07
02
1:2

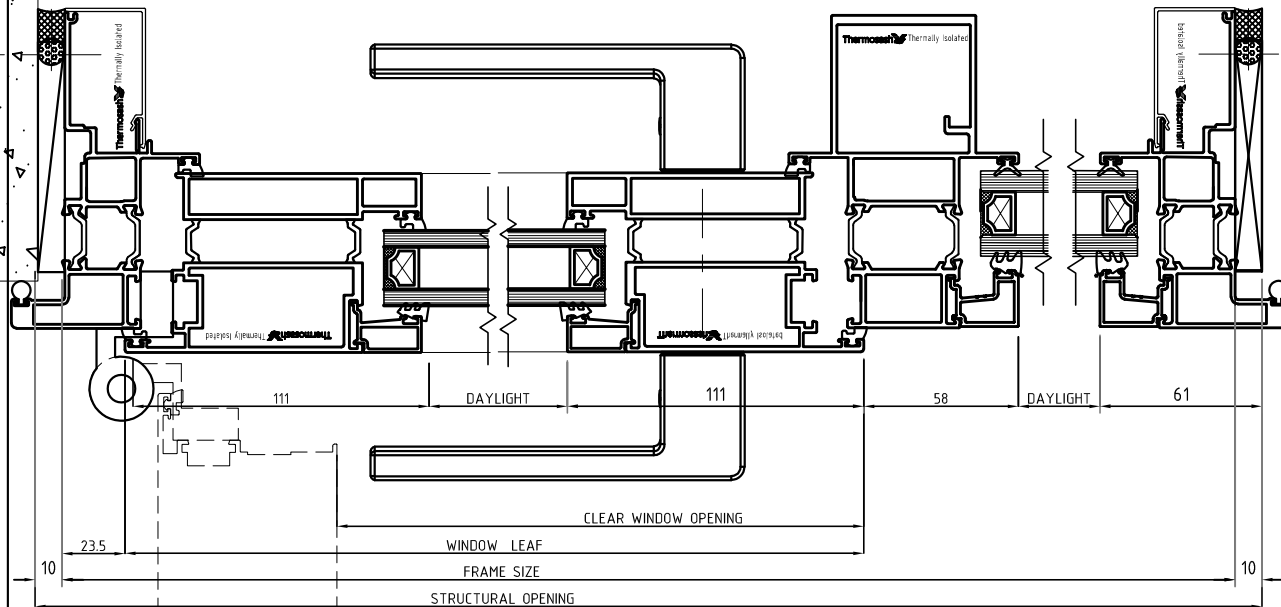

HINGE WINDOW
SILL
01
02
1:2

FIXED WINDOW
SILL
04
02
1:2

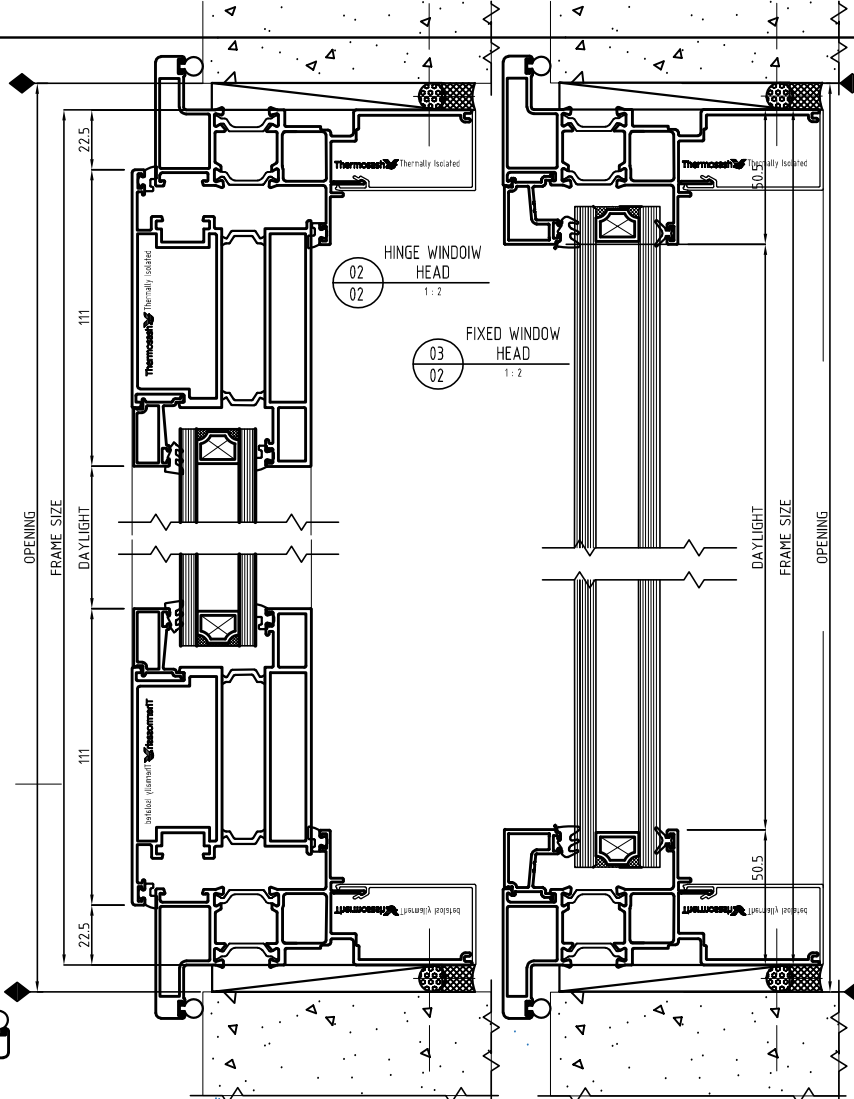

SYSTEM : THERMALLY BROKEN PUNCH WINDOW
 UNITSISED HIGH PERFORMANCE PANEL DOUBLE GLAZED (SEISMIC)
 SYSTEM

www.thermosash.co.nz ~ AUCKLAND: (09)444-4944 ~ WELLINGTON: (04)939-4500 ~ CHRISTCHURCH: (03)348-4004

TYPE : PUNCH WINDOW
 DOUBLE GLAZED (SEISMIC)

SCALE: NTS
 DATE: 10-Oct-25
 PAGE: DS70

