


NOTES:

- 1) DRAWING TO BE USED IN CONJUNCTION WITH 'MASTERSPEC' (4211)
- 2) WINDOW SYSTEMS REQUIRE SPECIFIC DESIGN DEPENDING ON SPANS, WIND-LOADS, BUILDING CONDITIONS, ETC.
- 3) INSIDE GLAZE, INTERNAL REINFORCEMENT AND SEISMIC FRAME OPTIONS AVAILABLE

GLAZING: GLASS THICKNESS TO SUIT REQUIREMENTS  
 HARDWARE: STANDARD HARDWARE OPTIONS  
 FINISHES: POWDER-COAT / ANODISED / PVF<sup>2</sup>

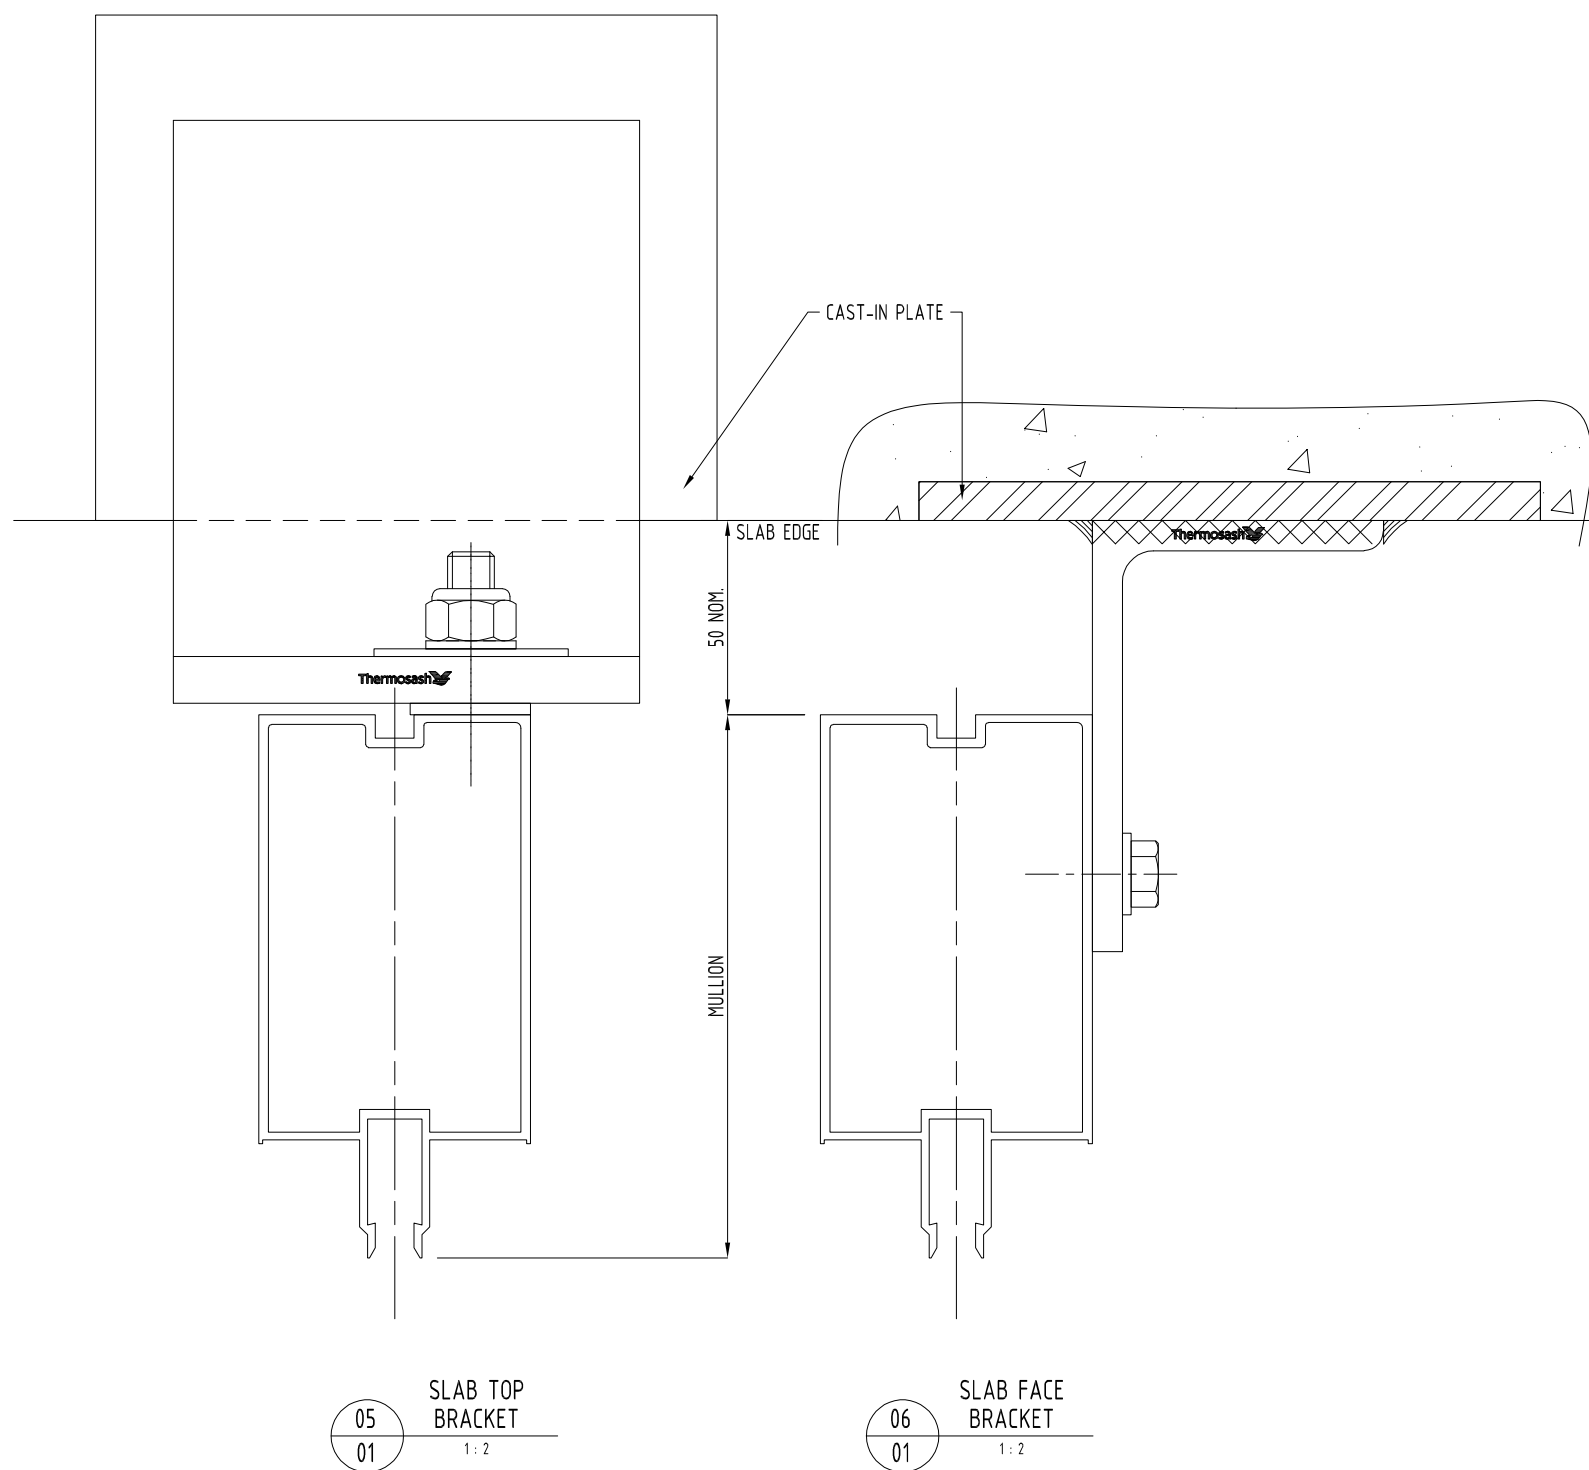

05  
01  
SLAB TOP  
BRACKET  
1:2

06  
01  
SLAB FACE  
BRACKET  
1:2

01  
01  
SURFACE  
BRACKET  
1:2



STANDARD  
FIXING  
SITUATIONS

02  
01  
RECESSED  
BRACKET  
1:2

03  
01  
UNDER  
SLAB  
1:2

AWKWARD  
CONDITIONS

04  
01  
SIDE  
BRACKET  
1:2

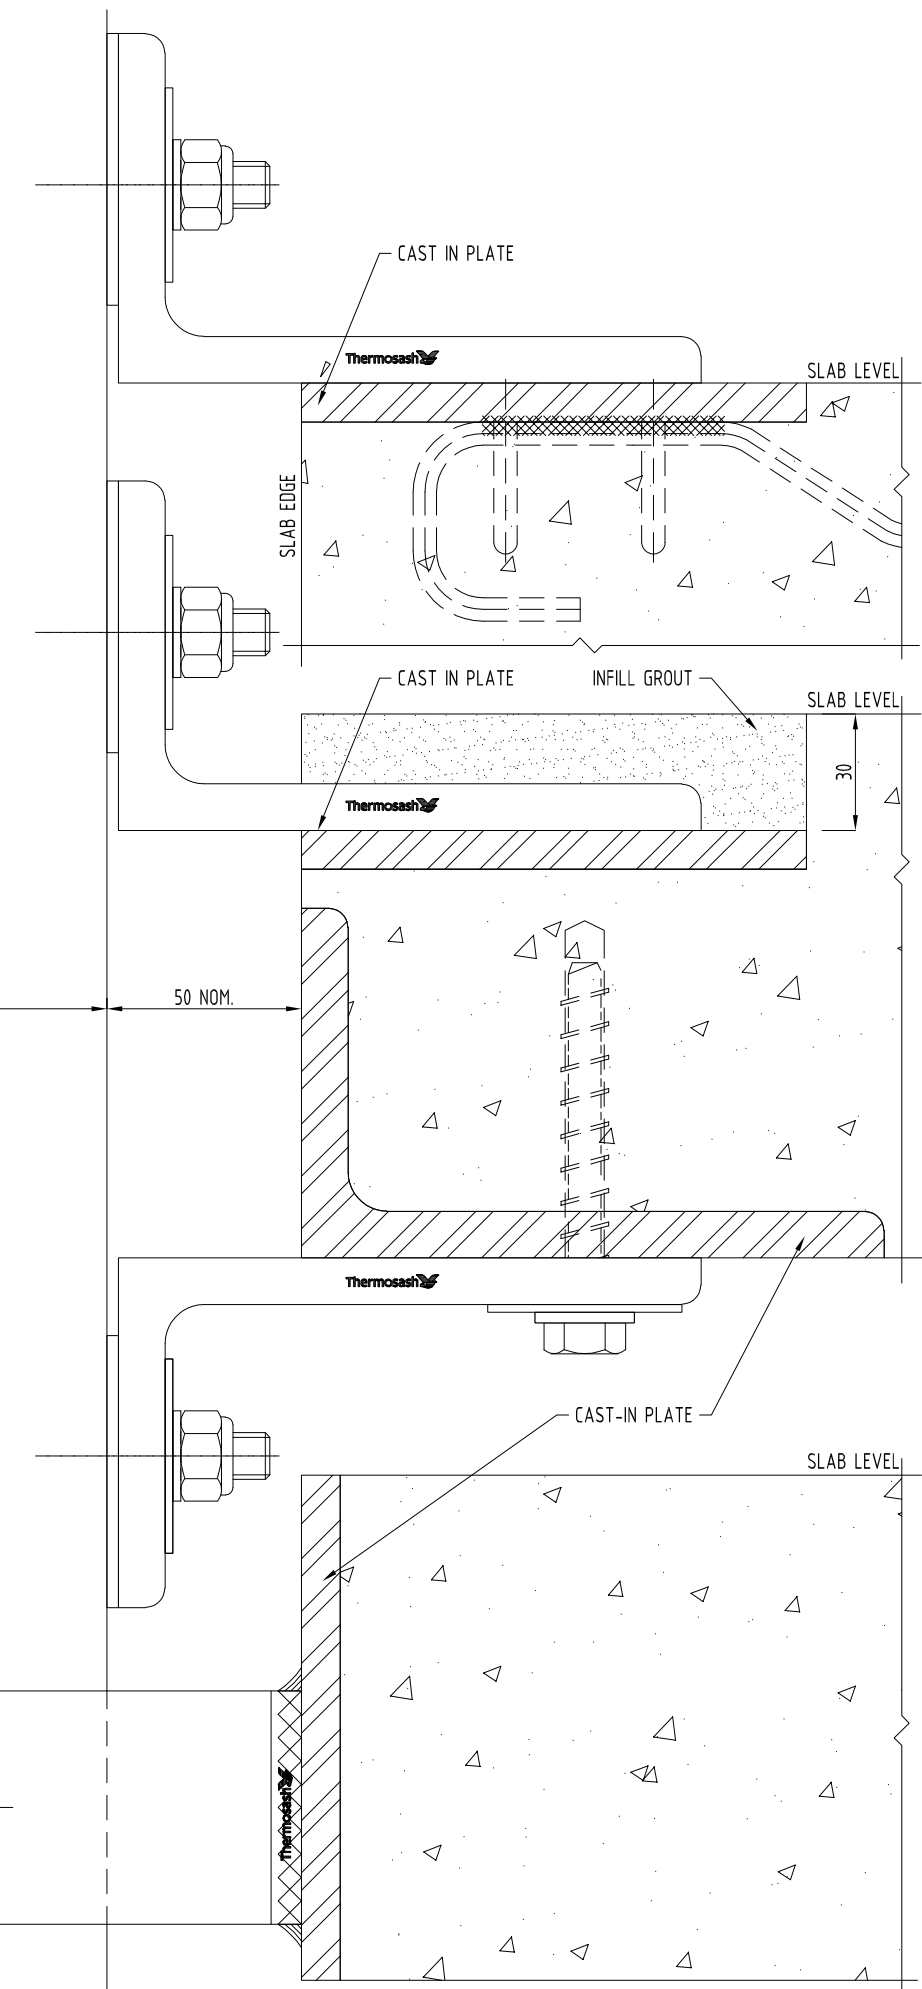

T:\USERS\avinie's\_stuff\KENT\FINAL TO KENT\Submit 19\CW BRKT.dwg