
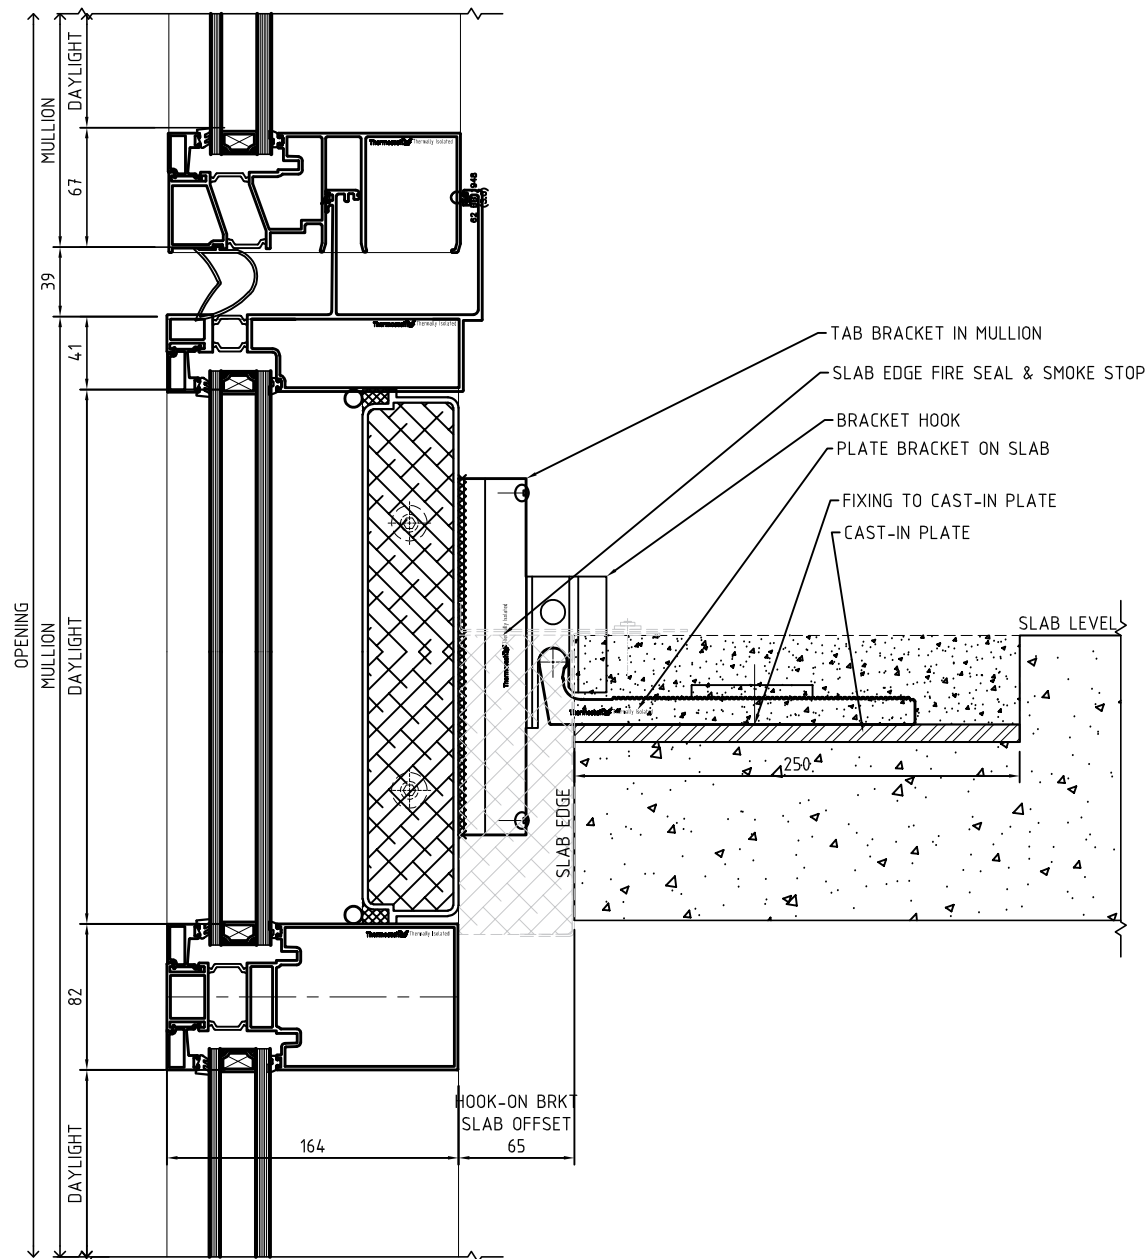


- NOTES:
- 1) DRAWING TO BE USED IN CONJUNCTION WITH 'MASTERSPEC' (4211)
 - 2) WINDOW SYSTEMS REQUIRE SPECIFIC DESIGN DEPENDING ON SPANS, WIND-LOADS, BUILDING CONDITIONS, ETC.
 - 3) INSIDE GLAZE, INTERNAL REINFORCEMENT AND SEISMIC FRAME OPTIONS AVAILABLE

GLAZING: GLASS THICKNESS TO SUIT REQUIREMENTS
 HARDWARE: STANDARD HARDWARE OPTIONS
 FINISHES: POWDER-COAT / ANODISED / PVF²

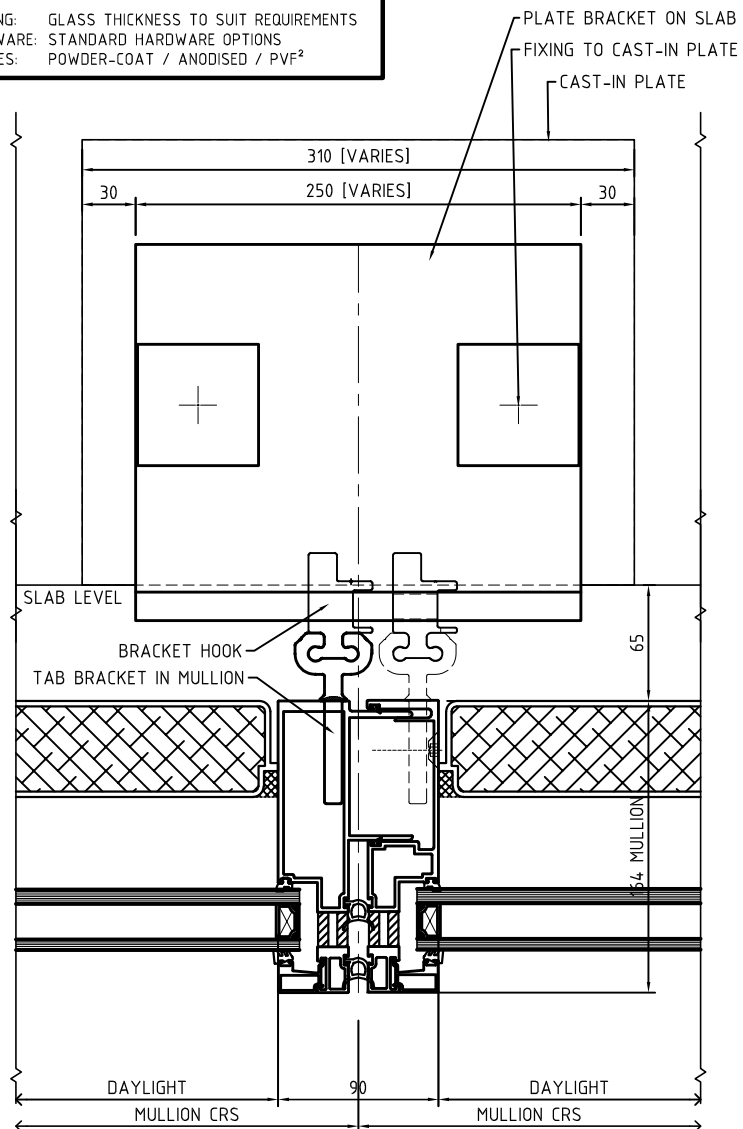

SYSTEM : THERMALLY BROKEN PW1000 UNITISED HIGH PERFORMANCE PANEL SYSTEM	TYPE : 160mm MULLION DOUBLE GLAZED (SEISMIC) HOOK-ON BRKT ON CONC.SLAB	SCALE: NTS	DATE: Sept-25	
		PAGE: TB PW400-BK160-1		
		www.thermosash.co.nz ~ AUCKLAND: (09)444-4944 ~ WELLINGTON: (04)939-4500 ~ CHRISTCHURCH: (03)348-4004		