

ENCLADTM TERRACOTTA - VERTICALLY LAID

ENCLADTM EN03 SUPPORT SYSTEM HOOK ON SECRET FIXED

	DRAWING REGISTER	₹	
PAGE	DETAIL DESCRIPTION	DETAIL#	REV.
00/16	COVER PAGE	00	NOV 22
01/16	CAVITY SET OUT	01	NOV 22
02/16	SCHEMATIC	02	NOV 22
03/16	VERTICAL PANEL JOINT DETAIL (PLAN VIEW)	03	NOV 22
04/16	PANEL MIDSPAN SUPPORT DETAIL (PLAN VIEW)	04	NOV 22
05/16	BRICKWALL ABUTMENT DETAIL (PLAN VIEW)	05	NOV 22
06/16	INTERNAL CORNER PANEL DETAIL (PLAN VIEW)	06	NOV 22
07/16	EXTERNAL CORNER PANEL DETAIL (PLAN VIEW)	07	NOV 22
08/16	WINDOW JAMB DETAIL (PLAN VIEW)	08	NOV 22
09/16	DOOR JAMB DETAIL (PLAN VIEW)	09	NOV 22
10/16	CONCRETE WALL ABUTMENT DETAIL (PLAN VIEW)	10	NOV 22
11/16	HORIZONTAL PANEL JOINT DETAIL (SECTION VIEW)	11	NOV 22
12/16	PARAPET FLASHING DETAIL (SECTION VIEW)	12	NOV 22
13/16	WINDOW HEAD DETAIL (SECTION VIEW)	13	NOV 22
14/16	DOOR HEAD DETAIL (SECTION VIEW)	14	NOV 22
15/16	WINDOW SILL DETAIL (SECTION VIEW)	15	NOV 22
16/16	BRICKWALL AT BASE DRIP DETAIL (SECTION VIEW)	16	NOV 22


PART OF THE THERMOSASH GROUP COMPANIES





COPYRIGHT: THESE DESIGNS, DETAILS AND/OR SPECIFICATIONS AND THE COPYRIGHT THEREIN, REMAIN THE PROPERTY
OF THERMOSASH COMMERCIAL LIMITED.

DISCLAIMER: THESE DETAILS ARE PROVIDED FOR NDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VAI DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR ENSURING DETAILS SATISFY ALL NEW ZEALAND BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR BISURING BUILDING WRAPS, FIRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AN NZBC REGULATIONS. REFER TO THERMOSASH WEBSITE FOR PLUI TERMS AND CONDITIONS.

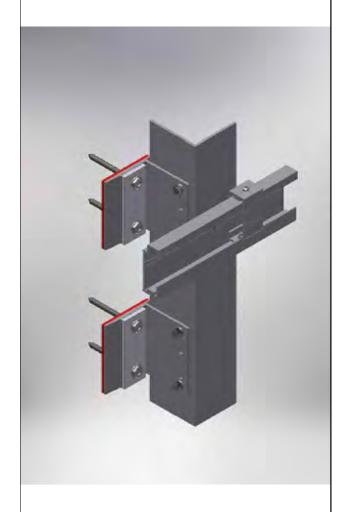

Cladding Type:

ENCLAD™ TERRACOTTA TILES - VERTICALLY LAID

Support System:

ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description : COVER PAGE

 Scale @ A3 :
 Rev. : NOV 2022

 System # :
 Detail # :

 TERRA-V-EN03-HOR-SF3
 00

ENCLAD™ RAINSCREEN SYSTEMS



EN03 - ADJUSTABLE SYSTEM CAVITY





PART OF THE THERMOSASH GROUP COMPANIES



DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY, CONSTRUCTION/SYSTEM DETAILS CAN VAR'
DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR
ENDURING DETAILS SATISTY ALL NEW ZEALAND BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR ENSURING
BUILDING WRAPS, FIRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND
NZEC REGULATIONS. REPERT OF THERMOSASH WEBSITE FOR FULL TERMS AND CONDITIONS.

	LEGEND
	LEGEND
А	ENCLAD TM TERRACOTTA TILES
В	52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)
С	* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION
D	* 50mm INSULATION (OPTION BY INSITE) FIRE STOP (OPTION BY INSITE)
*	OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 150mm THICK INSULATION

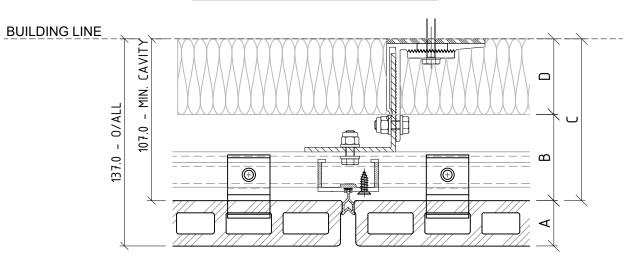


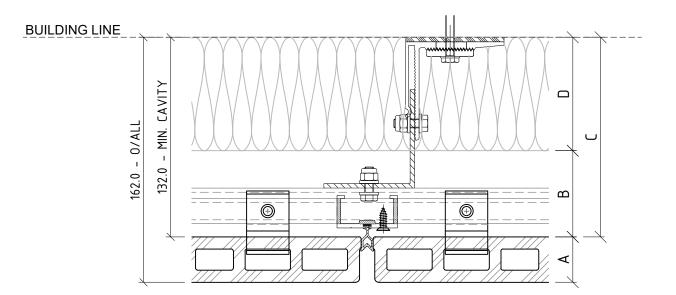

75mm THICK INSULATION IN CAVITY ZONE

50mm THICK INSULATION

IN CAVITY ZONE

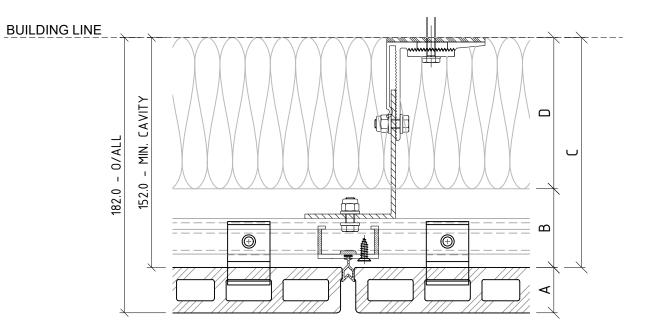

100mm THICK INSULATION IN CAVITY ZONE

Cladding Type:

ENCLAD™ TERRACOTTA TILES -VERTICALLY LAID

Support System:

ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description: CAVITY SETOUT (PLAN VIEW)

Scale @ A3: 1:2.5 Rev.: NOV 2022 System #: Detail #:


TERRA-V-EN03-HOR-SF3


01

ENCLAD™ RAINSCREEN SYSTEMS





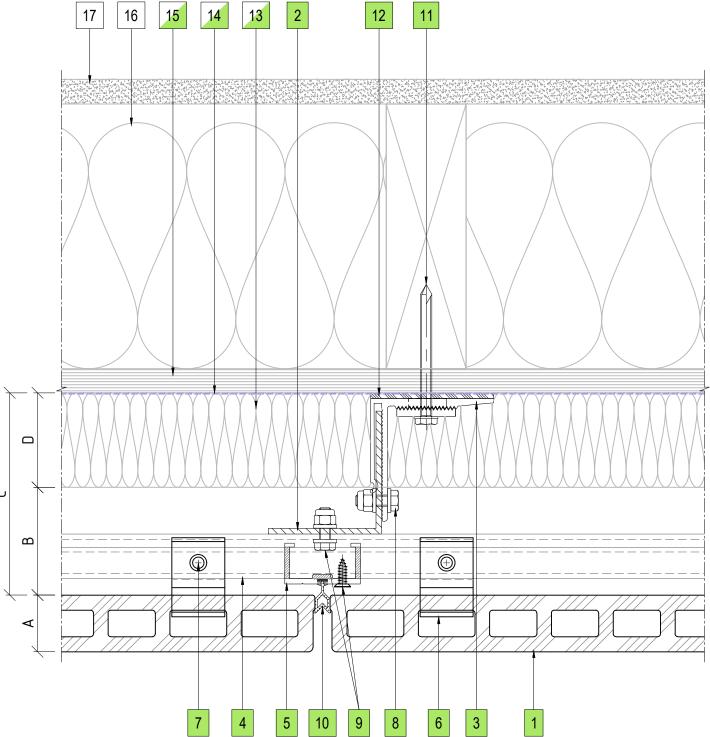

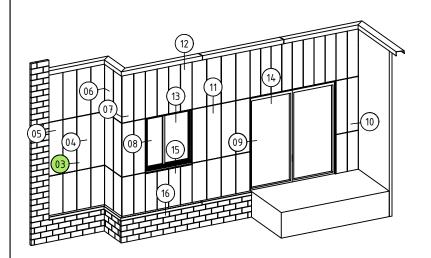

03 VERTICAL PANEL JOINT DETAIL ENCLADTM TERRACOTTA TILES

PART OF THE THERMOSASH GROUP COMPANIES :





COPYRIGHT: THESE DESIGNS, DETAILS AND/OR SPECIFICATIONS AND THE COPYRIGHT THEREIN, REMAIN THE PROPERTY OF THERMOSASH COMMERCIAL LIMITED.

DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VARY DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR RESURING DETAILS SATISTY ALL NEW ZEALAND BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR RESURING BUILDING WARPS, FIRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND NZEE REGULATIONS, REPERT OF THERMOSASH WEBSTEF FOR FULL TERMS AND CONDITIONS.

	LEGEND
А	ENCLAD TM TERRACOTTA TILES
В	52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)
С	* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION
D	* 50mm INSULATION (OPTION BY INSITE) FIRE STOP (OPTION BY INSITE)
*	OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 100mm THICK INSULATION
•	PARTS LIST
1	ENCLAD TM TERRACOTTA TILE
2	ENCLAD EN01 ALUMINIUM SUPPORT PROFILE
3	ENCLAD EN01 ALUMINIUM HELPING HAND BRACKET
4	ENCLAD EN01 ALUMINIUM HORIZONTAL RAIL
5	ENCLAD EN01 ALUMINIUM VERTICAL RAIL
6	ENCLAD EN01 ALUMINIUM TILE CLIP
7	ENCLAD HEIGHT ADJUST DEAD LOAD FIXING BOLT FIXING SCREW TO LOCK OFF (STAINLESS STEEL)
8	ENCLAD BRACKET TO RAIL FIXING (STAINLESS STEEL)
9	ENCLAD RAIL TO RAIL FIXING (STAINLESS STEEL)
10	ENCLAD GASKET
11	ENCLAD HOST STRUCTURAL FIXING (STAINLESS STEEL)
12	ENCLAD THERMAL ISOLATION PAD
13	CAVITY INSULATION (OPTION BY INSITE)
14	BUILDING WRAP / MEMBRANE (OPTION BY INSITE)
15	RIGID AIR BARRIER / SHEATHING BOARD (OPTION BY INSITE)
16	WALL INSULATION (BY OTHERS)
17	PLASTER BOARD (BY OTHERS)
\top	
\dashv	
\dashv	

Cladding Type:

ENCLAD™ TERRACOTTA TILES - VERTICALLY LAID

Support System:

ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description:


VERTICAL PANEL JOINT DETAIL (PLAN VIEW)


Scale @ A3 : 1:2	Rev.: NOV 2022
System #:	Detail #:
TERRA-V-EN03-HOR-SF3	03

ENCLAD™ RAINSCREEN SYSTEMS





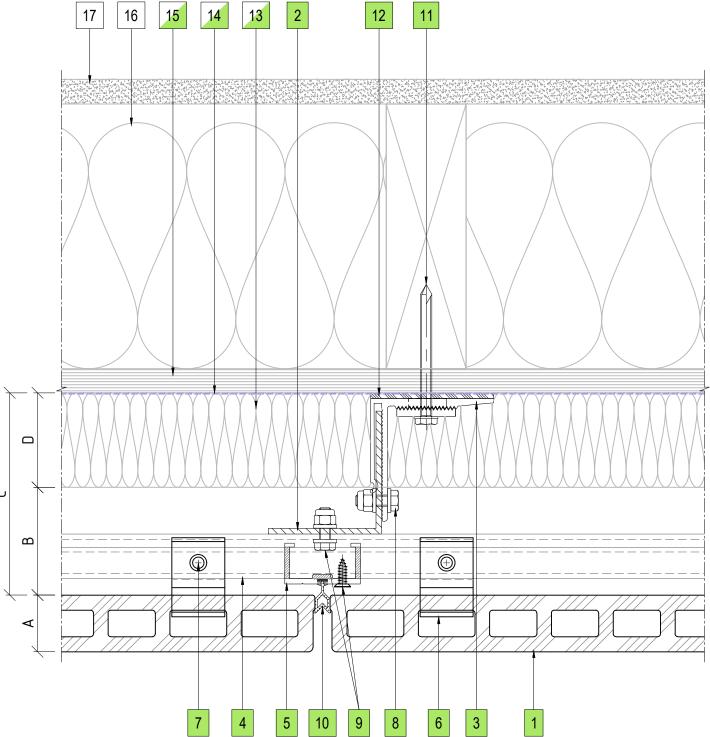

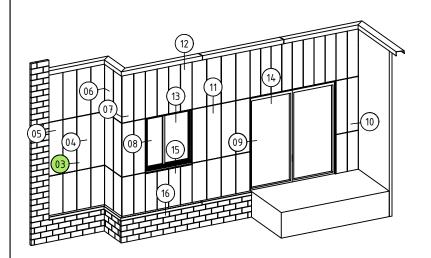

03 VERTICAL PANEL JOINT DETAIL ENCLADTM TERRACOTTA TILES

PART OF THE THERMOSASH GROUP COMPANIES :





COPYRIGHT: THESE DESIGNS, DETAILS AND/OR SPECIFICATIONS AND THE COPYRIGHT THEREIN, REMAIN THE PROPERTY OF THERMOSASH COMMERCIAL LIMITED.

DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VARY DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR RESURING DETAILS SATISTY ALL NEW ZEALAND BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR RESURING BUILDING WARPS, FIRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND NZEE REGULATIONS, REPERT OF THERMOSASH WEBSTEF FOR FULL TERMS AND CONDITIONS.

	LEGEND
А	ENCLAD TM TERRACOTTA TILES
В	52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)
С	* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION
D	* 50mm INSULATION (OPTION BY INSITE) FIRE STOP (OPTION BY INSITE)
*	OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 100mm THICK INSULATION
•	PARTS LIST
1	ENCLAD TM TERRACOTTA TILE
2	ENCLAD EN01 ALUMINIUM SUPPORT PROFILE
3	ENCLAD EN01 ALUMINIUM HELPING HAND BRACKET
4	ENCLAD EN01 ALUMINIUM HORIZONTAL RAIL
5	ENCLAD EN01 ALUMINIUM VERTICAL RAIL
6	ENCLAD EN01 ALUMINIUM TILE CLIP
7	ENCLAD HEIGHT ADJUST DEAD LOAD FIXING BOLT FIXING SCREW TO LOCK OFF (STAINLESS STEEL)
8	ENCLAD BRACKET TO RAIL FIXING (STAINLESS STEEL)
9	ENCLAD RAIL TO RAIL FIXING (STAINLESS STEEL)
10	ENCLAD GASKET
11	ENCLAD HOST STRUCTURAL FIXING (STAINLESS STEEL)
12	ENCLAD THERMAL ISOLATION PAD
13	CAVITY INSULATION (OPTION BY INSITE)
14	BUILDING WRAP / MEMBRANE (OPTION BY INSITE)
15	RIGID AIR BARRIER / SHEATHING BOARD (OPTION BY INSITE)
16	WALL INSULATION (BY OTHERS)
17	PLASTER BOARD (BY OTHERS)
\top	
\dashv	
\dashv	

Cladding Type:

ENCLAD™ TERRACOTTA TILES - VERTICALLY LAID

Support System:

ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description:


VERTICAL PANEL JOINT DETAIL (PLAN VIEW)

Scale @ A3 : 1:2	Rev.: NOV 2022
System #:	Detail #:
TERRA-V-EN03-HOR-SF3	03

ENCLAD™ RAINSCREEN SYSTEMS





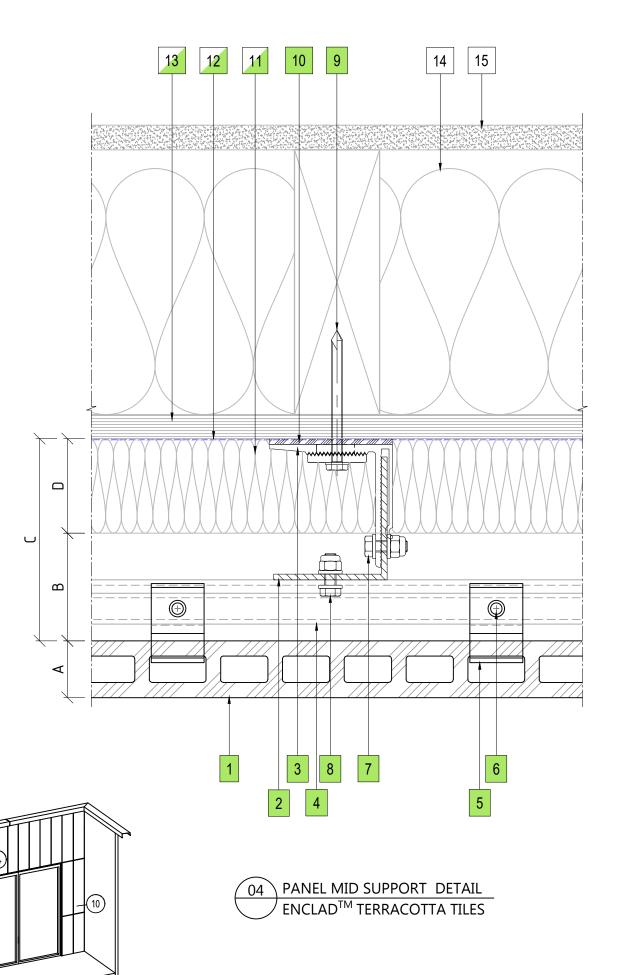





COPYRIGHT: THESE DESIGNS, DETAILS AND/OR SPECIFICATIONS AND THE COPYRIGHT THEREIN, REMAIN THE PROPERTY OF THERMOSASH COMMERCIAL LIMITED.

DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VARY DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR RESURRING DETAILS SATISTY ALL NEW ZELANDA BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR RESURRING BUILDING WAPS, FIRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND NEZE REGULATIONS. REPER TO THERMOSASH WEBSITE FOR FULL TERMS AND CONDITIONS.

	LEGEND
А	ENCLAD TM TERRACOTTA TILES
В	52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)
С	* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION
D	* 50mm INSULATION (OPTION BY INSITE) FIRE STOP (OPTION BY INSITE)
*	OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 100mm THICK INSULATION
•	PARTS LIST
1	ENCLAD™ TERRACOTTA TILE
2	ENCLAD EN01 ALUMINIUM SUPPORT PROFILE
3	ENCLAD EN01 ALUMINIUM HELPING HAND BRACKET
4	ENCLAD EN01 ALUMINIUM HORIZONTAL RAIL
5	ENCLAD EN01 ALUMINIUM TILE CLIP
6	ENCLAD HEIGHT ADJUST DEAD LOAD FIXING BOLT FIXING SCREW TO LOCK OFF (STAINLESS STEEL)
7	ENCLAD BRACKET TO RAIL FIXING (STAINLESS STEEL)
8	ENCLAD RAIL TO RAIL FIXING (STAINLESS STEEL)
9	ENCLAD HOST STRUCTURAL FIXING (STAINLESS STEEL)
10	ENCLAD THERMAL ISOLATION PAD
11	CAVITY INSULATION (OPTION BY INSITE)
12	BUILDING WRAP / MEMBRANE (OPTION BY INSITE)
13	RIGID AIR BARRIER / SHEATHING BOARD (OPTION BY INSITE)
14	WALL INSULATION (BY OTHERS)
15	PLASTER BOARD (BY OTHERS)
_	

Cladding Type:

ENCLAD™ TERRACOTTA TILES - VERTICALLY LAID

Support System:

ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description :

PANEL MIDSPAN SUPPORT DETAIL (PLAN VIEW)

 Scale @ A3 : 1:2
 Rev. : NOV 2022

 System # :
 Detail # :


 TERRA-V-EN03-HOR-SF3
 04


ENCLAD™ RAINSCREEN SYSTEMS



158 CENTRAL PARK DRIVE, HENDERSON, AUCKLAND 0610 NEW ZEALAND



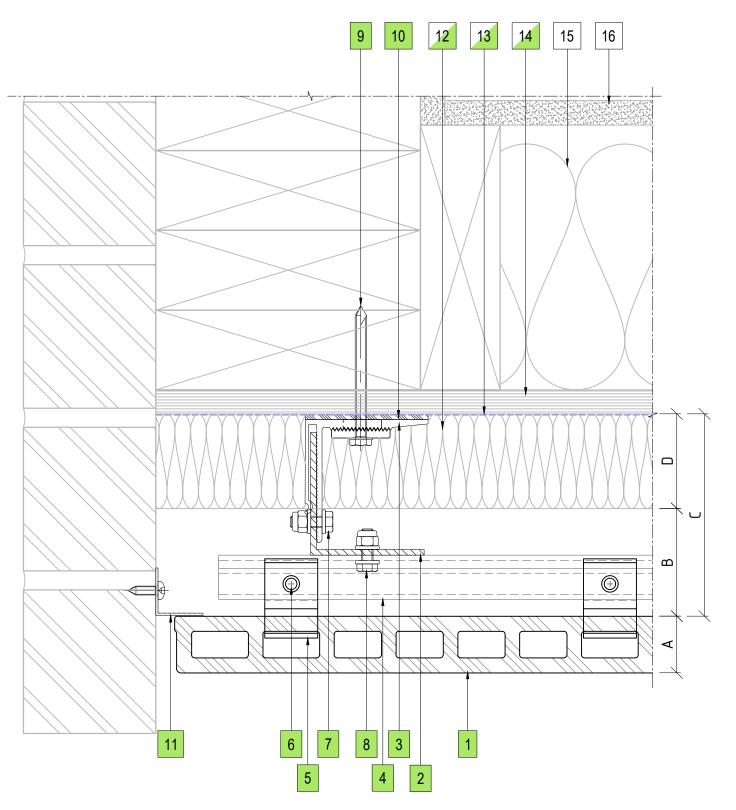

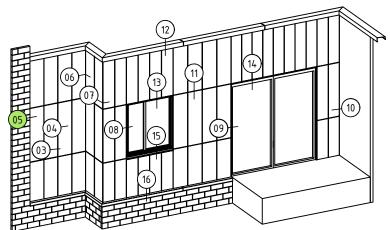

05 BRICKWALL ABUTMENT DETAIL ENCLADTM TERRACOTTA TILES

PART OF THE THERMOSASH GROUP COMPANIES :





COPYRIGHT: THESE DESIGNS, DETAILS AND/OR SPECIFICATIONS AND THE COPYRIGHT THEREIN, REMAIN THE PROPERT OF THERMOSASH COMMERCIAL LIMITED.

DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VARY DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR RESURRING DETAILS SATIETY ALL NEW ZEALAND BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR RESURING BUILDING WARDS. FIRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND NAZE REGULATIONS. EIGER TO THERMOSASH WEBSITE OF ROLL TERMS AND CONDITIONS.

	LEGEND
А	ENCLAD TM TERRACOTTA TILES
В	52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)
С	* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION
D	* 50mm INSULATION (OPTION BY INSITE) FIRE STOP (OPTION BY INSITE)
*	OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 100mm THICK INSULATION
•	PARTS LIST
1	ENCLAD TM TERRACOTTA TILE
2	ENCLAD EN01 ALUMINIUM SUPPORT PROFILE
3	ENCLAD EN01 ALUMINIUM HELPING HAND BRACKET
4	ENCLAD EN01 ALUMINIUM HORIZONTAL RAIL
5	ENCLAD EN01 ALUMINIUM TILE CLIP
6	ENCLAD HEIGHT ADJUST DEAD LOAD FIXING BOLT FIXING SCREW TO LOCK OFF (STAINLESS STEEL)
7	ENCLAD BRACKET TO RAIL FIXING (STAINLESS STEEL)
8	ENCLAD RAIL TO RAIL FIXING (STAINLESS STEEL)
9	ENCLAD HOST STRUCTURAL FIXING (STAINLESS STEEL)
10	ENCLAD THERMAL ISOLATION PAD
11	ENCLAD ALUMINIUM CLOSURE
12	CAVITY INSULATION (OPTION BY INSITE)
13	BUILDING WRAP / MEMBRANE (OPTION BY INSITE)
14	RIGID AIR BARRIER / SHEATHING BOARD (OPTION BY INSITE)
15	WALL INSULATION (BY OTHERS)
16	PLASTER BOARD (BY OTHERS)

Cladding Type:

ENCLAD™ TERRACOTTA TILES - VERTICALLY LAID

Support System:

ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description:


BRICKWALL ABUTMENT DETAIL (PLAN VIEW)

Scale @ A3 : 1:2	Rev.: NOV 2022
System #:	Detail # :
TFRRA-V-FN03-HOR-SF3	05

ENCLAD™ RAINSCREEN SYSTEMS



158 CENTRAL PARK DRIVE, HENDERSON, AUCKLAND 0610 NEW ZEALAND

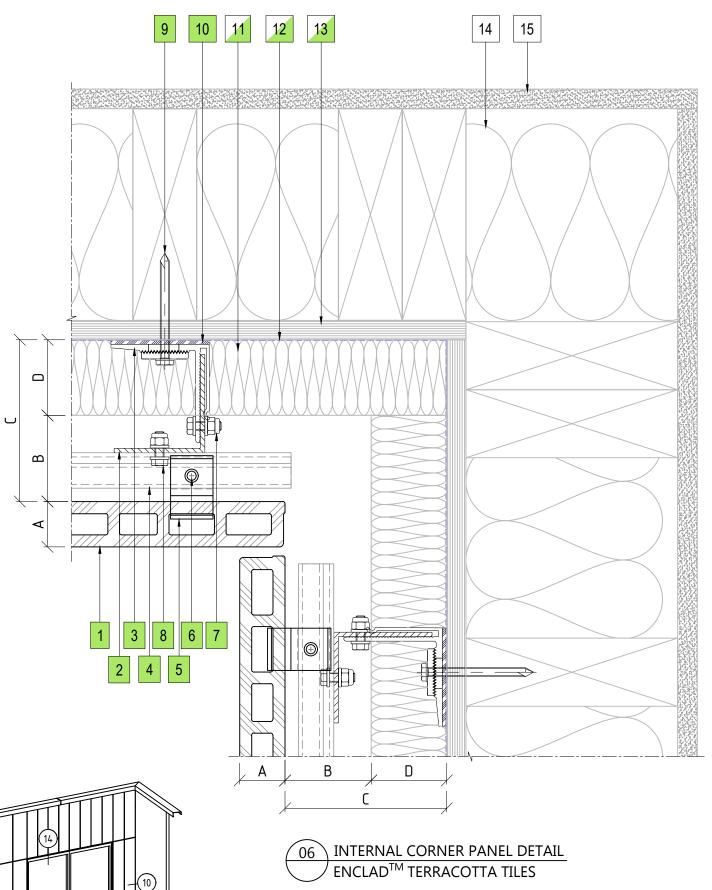





COPYRIGHT: THESE DESIGNS, DETAILS AND/OR SPECIFICATIONS AND THE COPYRIGHT THEREIN, REMAIN THE PROPERTY
OF THERMOSASH COMMERCIAL LIMITED.

DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VARY DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR RESURRING DETAILS SATISTY ALL NEW ZELANDA BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR RESURRING BUILDING WAPS, FIRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND NEZE REGULATIONS. REPER TO THERMOSASH WEBSITE FOR FULL TERMS AND CONDITIONS.

LEGEND
ENCLAD™ TERRACOTTA TILES
52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)
* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION
* 50mm INSULATION (OPTION BY INSITE) FIRE STOP (OPTION BY INSITE)
OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 100mm THICK INSULATION
PARTS LIST
ENCLAD™ TERRACOTTA TILE
ENCLAD EN01 ALUMINIUM SUPPORT PROFILE
ENCLAD EN01 ALUMINIUM HELPING HAND BRACKET
ENCLAD EN01 ALUMINIUM HORIZONTAL RAIL
ENCLAD EN01 ALUMINIUM TILE CLIP
ENCLAD HEIGHT ADJUST DEAD LOAD FIXING BOLT FIXING SCREW TO LOCK OFF (STAINLESS STEEL)
ENCLAD BRACKET TO RAIL FIXING (STAINLESS STEEL)
ENCLAD RAIL TO RAIL FIXING (STAINLESS STEEL)
ENCLAD HOST STRUCTURAL FIXING (STAINLESS STEEL)
ENCLAD THERMAL ISOLATION PAD
CAVITY INSULATION (OPTION BY INSITE)
BUILDING WRAP / MEMBRANE (OPTION BY INSITE)
RIGID AIR BARRIER / SHEATHING BOARD (OPTION BY INSITE)
WALL INSULATION (BY OTHERS)
PLASTER BOARD (BY OTHERS)

Cladding Type:

ENCLAD™ TERRACOTTA TILES - VERTICALLY LAID

Support System:

ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description:


INTERNAL CORNER PANEL DETAIL (PLAN VIEW)


Scale @ A3 : 1:2.5	Rev.: NOV 2022
System #:	Detail # :
TERRA-V-EN03-HOR-SF3	06

ENCLAD™ RAINSCREEN SYSTEMS





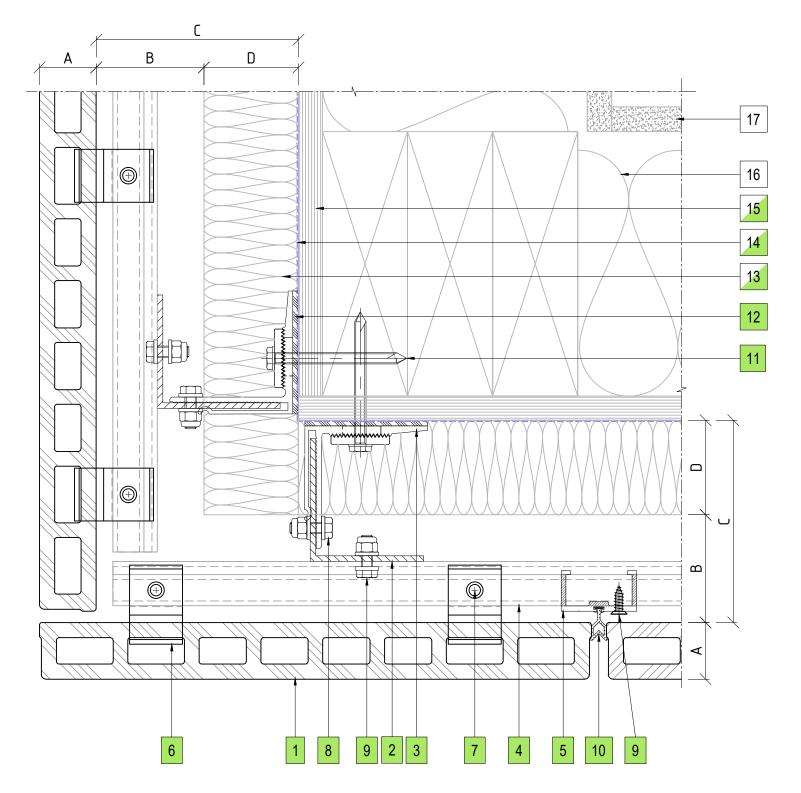

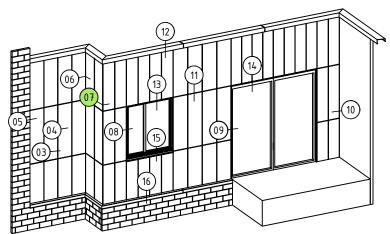

07 EXTERNAL CORNER PANEL DETAIL ENCLADTM TERRACOTTA TILES

PART OF THE THERMOSASH GROUP COMPANIES :





COPYRIGHT: THESE DESIGNS, DETAILS AND/OR SPECIFICATIONS AND THE COPYRIGHT THEREIN, REMAIN THE PROPERTY OF THERMOSASH COMMERCIAL LIMITED.

DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VARY DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND DENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR RENSURING DETAILS SATISTY ALL NEW ZEALAND BULIDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR REVUINING BULIDING WORD CLAUSES THE DESIGNER IS RESPONSIBLE FOR REVUINING BULIDING WORD AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND NZEC REGULATIONS. REFER TO THEMMOSAF WESTER FOR PULL TERMS AND CONDITIONS.

	LEGEND
А	ENCLAD TM TERRACOTTA TILES
В	52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)
С	* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION
D	* 50mm INSULATION (OPTION BY INSITE) FIRE STOP (OPTION BY INSITE)
*	OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 100mm THICK INSULATION
•	PARTS LIST
1	ENCLAD TM TERRACOTTA TILE
2	ENCLAD EN01 ALUMINIUM SUPPORT PROFILE
3	ENCLAD EN01 ALUMINIUM HELPING HAND BRACKET
4	ENCLAD EN01 ALUMINIUM HORIZONTAL RAIL
5	ENCLAD EN01 ALUMINIUM VERTICAL RAIL
6	ENCLAD EN01 ALUMINIUM TILE CLIP
7	ENCLAD HEIGHT ADJUST DEAD LOAD FIXING BOLT FIXING SCREW TO LOCK OFF (STAINLESS STEEL)
8	ENCLAD BRACKET TO RAIL FIXING (STAINLESS STEEL)
9	ENCLAD RAIL TO RAIL FIXING (STAINLESS STEEL)
10	ENCLAD GASKET
11	ENCLAD HOST STRUCTURAL FIXING (STAINLESS STEEL)
12	ENCLAD THERMAL ISOLATION PAD
13	CAVITY INSULATION (OPTION BY INSITE)
14	BUILDING WRAP / MEMBRANE (OPTION BY INSITE)
15	RIGID AIR BARRIER / SHEATHING BOARD (OPTION BY INSITE)
16	WALL INSULATION (BY OTHERS)
17	PLASTER BOARD (BY OTHERS)

Cladding Type:

ENCLAD™ TERRACOTTA TILES - VERTICALLY LAID

Support System:

ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description:

EXTERNAL CORNER PANEL DETAIL (PLAN VIEW)

 Scale @ A3 : 1:2
 Rev. : NOV 2022

 System # :
 Detail # :

 TERRA-V-EN03-HOR-SF3
 07

ENCLAD™ RAINSCREEN SYSTEMS



158 CENTRAL PARK DRIVE, HENDERSON, AUCKLAND 0610 NEW ZEALAND P: +64 9 444 4944

www.thermosash.co.nz





COPYRIGHT: THESE DESIGNS, DETAILS AND/OR SPECIFICATIONS AND THE COPYRIGHT THEREIN, REMAIN THE PROPERTY
OF THERMOSASH COMMERCIAL LIMITED.

DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VARY DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR RENSURING DETAILS SATISTY ALL NEW ZEALAND BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR RENSURING BUILDING WARDS. STRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND NAZE KEGULATIONS. REFER TO HERMOSASH WEESTER FOR FULL TERMS AND CONDITIONS.

LEGEND		
А	ENCLAD TM TERRACOTTA TILES	
В	52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)	
С	* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION	
D	* 50mm INSULATION (OPTION BY INSITE) FIRE STOP (OPTION BY INSITE)	
*	OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 100mm THICK INSULATION	
	PARTS LIST	
1	ENCLAD TM TERRACOTTA TILE	
2	ENCLAD EN01 ALUMINIUM SUPPORT PROFILE	
3	ENCLAD EN01 ALUMINIUM HELPING HAND BRACKET	
4	ENCLAD EN01 ALUMINIUM HORIZONTAL RAIL	
5	ENCLAD EN01 ALUMINIUM TILE CLIP	
6	ENCLAD HEIGHT ADJUST DEAD LOAD FIXING BOLT FIXING SCREW TO LOCK OFF (STAINLESS STEEL)	
7	ENCLAD BRACKET TO RAIL FIXING (STAINLESS STEEL)	
8	ENCLAD RAIL TO RAIL FIXING (STAINLESS STEEL)	
9	ENCLAD HOST STRUCTURAL FIXING (STAINLESS STEEL)	
10	ENCLAD THERMAL ISOLATION PAD	
11	ENCLAD ALUMINIUM CLOSURE	
12	CAVITY INSULATION (OPTION BY INSITE)	
13	BUILDING WRAP / MEMBRANE (OPTION BY INSITE)	
14	RIGID AIR BARRIER / SHEATHING BOARD (OPTION BY INSITE)	
15	ALUMINIUM DOORS, WINDOWS & REVEALS (OPTION BY INSITE)	
16	WALL INSULATION (BY OTHERS)	
17	PLASTER BOARD (BY OTHERS)	

Cladding Type:

ENCLAD™ TERRACOTTA TILES - VERTICALLY LAID

Support System:

ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description: WINDOW JAMB DETAIL (PLAN VIEW)


 Scale @ A3 : 1:2
 Rev. : NOV 2022

 System # :
 Detail # :

TERRA-V-EN03-HOR-SF3





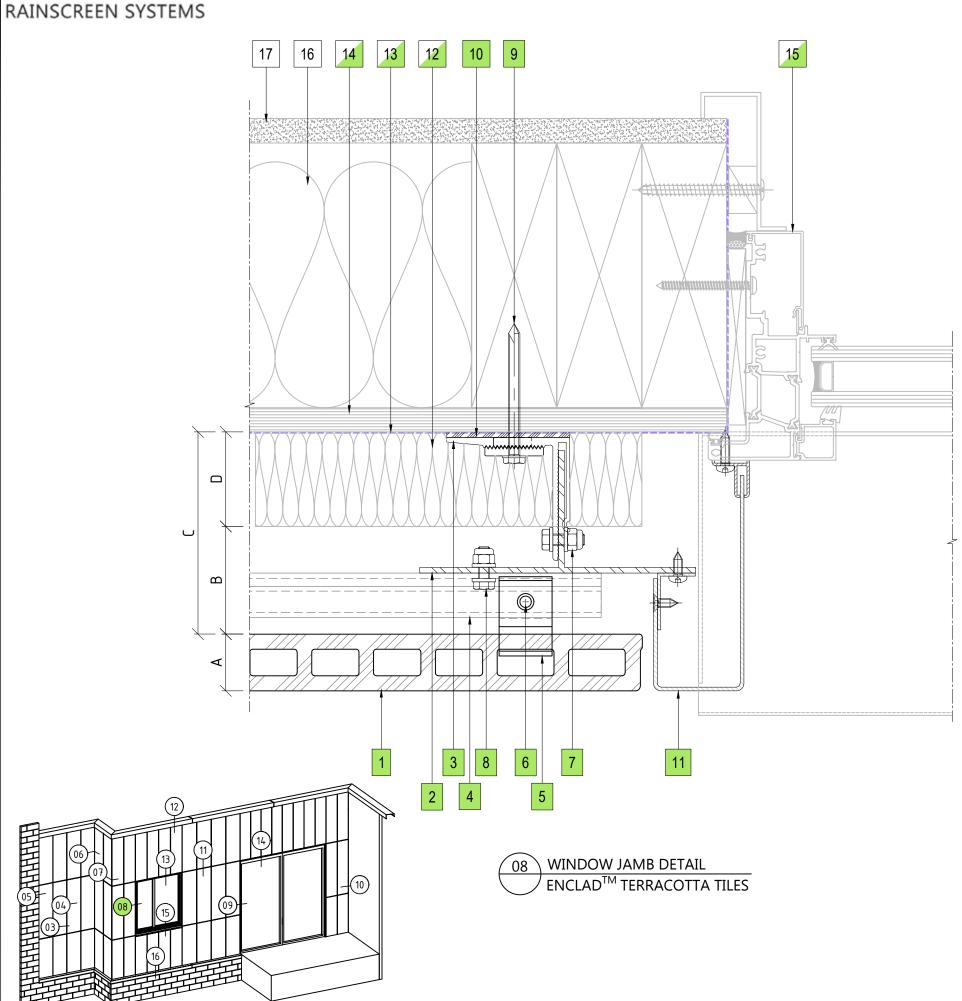





DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VARY DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR RESURRING DETAILS SATISTY ALL NEW ZELANDA BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR RESURRING BUILDING WAPS, FIRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND NEZE REGULATIONS. REPER TO THERMOSASH WEBSITE FOR FULL TERMS AND CONDITIONS.

LEGEND		
А	ENCLAD TM TERRACOTTA TILES	
B 52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)		
С	* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION	
D * 50mm INSULATION (OPTION BY INSITE) FIRE STOP (OPTION BY INSITE)		
*	OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 100mm THICK INSULATION	
•	PARTS LIST	
1	ENCLAD TM TERRACOTTA TILE	
2	ENCLAD EN01 ALUMINIUM SUPPORT PROFILE	
3	ENCLAD EN01 ALUMINIUM HELPING HAND BRACKET	
4	ENCLAD EN01 ALUMINIUM HORIZONTAL RAIL	
5	ENCLAD EN01 ALUMINIUM TILE CLIP	
6	ENCLAD HEIGHT ADJUST DEAD LOAD FIXING BOLT FIXING SCREW TO LOCK OFF (STAINLESS STEEL)	
7	ENCLAD BRACKET TO RAIL FIXING (STAINLESS STEEL)	
8	ENCLAD RAIL TO RAIL FIXING (STAINLESS STEEL)	
9	ENCLAD HOST STRUCTURAL FIXING (STAINLESS STEEL)	
10	ENCLAD THERMAL ISOLATION PAD	
11	ENCLAD ALUMINIUM CLOSURE	
12	CAVITY INSULATION (OPTION BY INSITE)	
13	BUILDING WRAP / MEMBRANE (OPTION BY INSITE)	
14	RIGID AIR BARRIER / SHEATHING BOARD (OPTION BY INSITE)	
15	ALUMINIUM DOORS, WINDOWS & REVEALS (OPTION BY INSITE)	
16	WALL INSULATION (BY OTHERS)	
17	PLASTER BOARD (BY OTHERS)	

Cladding Type:

ENCLAD™ TERRACOTTA TILES -VERTICALLY LAID

Support System:


ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description: DOOR JAMB DETAIL (PLAN VIEW)

Scale @ A3 : 1:2	Rev.: NOV 2022
System #:	Detail # :
TERRA-V-EN03-HOR-SF3	09

ENCLAD™ RAINSCREEN SYSTEMS



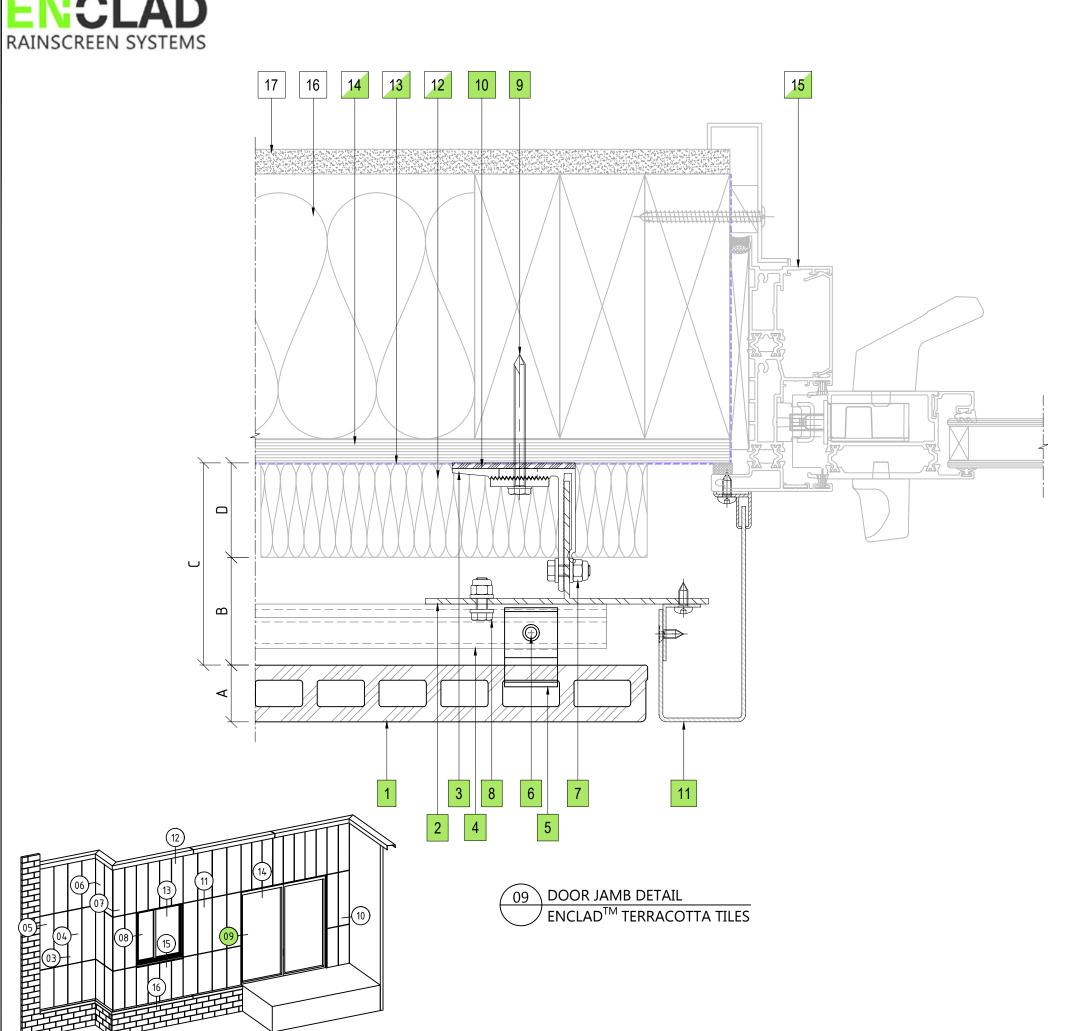





COPYRIGHT: THESE DESIGNS, DETAILS AND/OR SPECIFICATIONS AND THE COPYRIGHT THEREIN, REMAIN THE PROPERTY
OF THERMOSASH COMMERCIAL LIMITED

DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VARY DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR RESURRING DETAILS SATISTY ALL NEW ZELANDA BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR RESURRING BUILDING WAPS, FIRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND NEZE REGULATIONS. REPER TO THERMOSASH WEBSITE FOR FULL TERMS AND CONDITIONS.

	LEGEND
А	ENCLAD™ TERRACOTTA TILES
В	52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)
С	* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION
D	* 50mm INSULATION (OPTION BY INSITE) FIRE STOP (OPTION BY INSITE)
*	OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 100mm THICK INSULATION
	PARTS LIST
1	ENCLAD™ TERRACOTTA TILE
2	ENCLAD EN01 ALUMINIUM SUPPORT PROFILE
3	ENCLAD EN01 ALUMINIUM HELPING HAND BRACKET
4	ENCLAD EN01 ALUMINIUM HORIZONTAL RAIL
5	ENCLAD EN01 ALUMINIUM TILE CLIP
6	ENCLAD HEIGHT ADJUST DEAD LOAD FIXING BOLT FIXING SCREW TO LOCK OFF (STAINLESS STEEL)
7	ENCLAD BRACKET TO RAIL FIXING (STAINLESS STEEL)
8	ENCLAD RAIL TO RAIL FIXING (STAINLESS STEEL)
9	ENCLAD HOST STRUCTURAL FIXING (STAINLESS STEEL)
10	ENCLAD THERMAL ISOLATION PAD
11	ENCLAD ALUMINIUM CLOSURE
12	CAVITY INSULATION (OPTION BY INSITE)
13	BUILDING WRAP / MEMBRANE (OPTION BY INSITE)
14	RIGID AIR BARRIER / SHEATHING BOARD (OPTION BY INSITE)
15	WALL INSULATION (BY OTHERS)
16	PLASTER BOARD (BY OTHERS)
-+	

Cladding Type:

ENCLAD™ TERRACOTTA TILES - VERTICALLY LAID

Support System:

ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description:

CONCRETE WALL ABUTMENT DETAIL (PLAN VIEW)

 Scale @ A3 : 1:2
 Rev. : NOV 2022

 System # :
 Detail # :


 TERRA-V-EN03-HOR-SF3
 10


ENCLAD™ RAINSCREEN SYSTEMS



158 CENTRAL PARK DRIVE, HENDERSON, AUCKLAND 0610 NEW ZEALAND



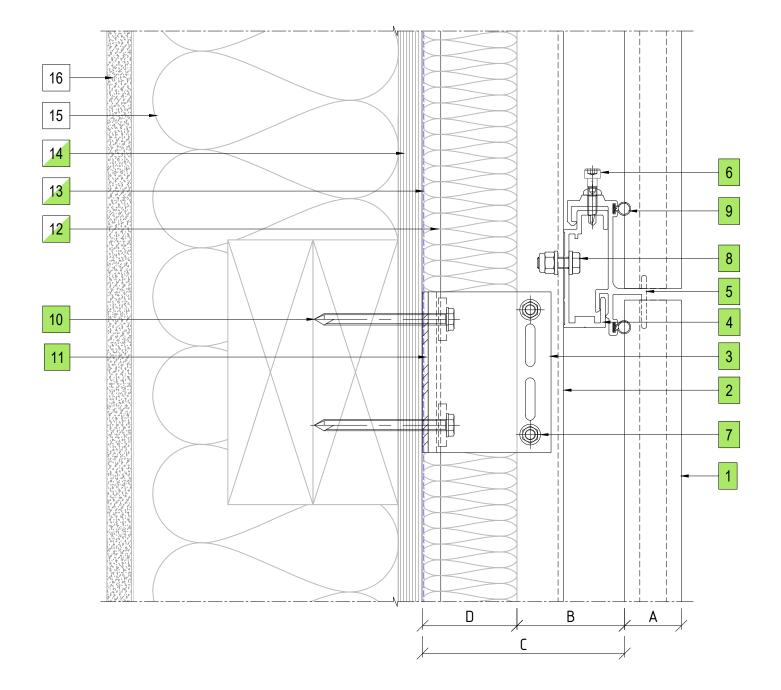

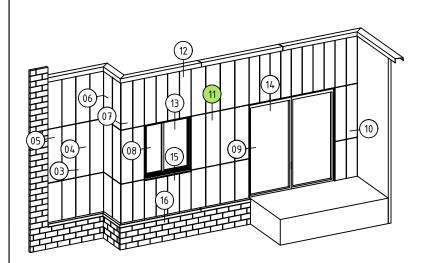

HORIZONTAL PANEL JOINT DETAIL ENCLADTM TERRACOTTA TILES

PART OF THE THERMOSASH GROUP COMPANIES :





COPYRIGHT: THESE DESIGNS, DETAILS AND/OR SPECIFICATIONS AND THE COPYRIGHT THEREIN, REMAIN THE PROPERTY OF THERMOSASH COMMERCIAL LIMITED.

DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VARY DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR RESURRING DETAILS SATISTY ALL NEW ZELANDA BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR RESURRING BUILDING WAPS, FIRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND NEZE REGULATIONS. REPER TO THERMOSASH WEBSITE FOR FULL TERMS AND CONDITIONS.

LEGEND		
А	ENCLAD TM TERRACOTTA TILES	
В	52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)	
С	* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION	
D	* 50mm INSULATION (OPTION BY INSITE) FIRE STOP (OPTION BY INSITE)	
*	OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 100mm THICK INSULATION	
·	PARTS LIST	
1	ENCLAD TM TERRACOTTA TILE	
2	ENCLAD EN01 ALUMINIUM SUPPORT PROFILE	
3	ENCLAD EN01 ALUMINIUM HELPING HAND BRACKET	
4	ENCLAD EN01 ALUMINIUM HORIZONTAL RAIL	
5	ENCLAD EN01 ALUMINIUM TILE CLIP	
6	ENCLAD HEIGHT ADJUST DEAD LOAD FIXING BOLT FIXING SCREW TO LOCK OFF (STAINLESS STEEL)	
7	ENCLAD BRACKET TO RAIL FIXING (STAINLESS STEEL)	
8	ENCLAD RAIL TO RAIL FIXING (STAINLESS STEEL)	
9 ENCLAD GASKET		
10	ENCLAD HOST STRUCTURAL FIXING (STAINLESS STEEL)	
11	ENCLAD THERMAL ISOLATION PAD	
12	CAVITY INSULATION (OPTION BY INSITE)	
13	BUILDING WRAP / MEMBRANE (OPTION BY INSITE)	
14	RIGID AIR BARRIER / SHEATHING BOARD (OPTION BY INSITE)	
15	WALL INSULATION (BY OTHERS)	
16	PLASTER BOARD (BY OTHERS)	
\dashv		

Cladding Type:

ENCLAD™ TERRACOTTA TILES - VERTICALLY LAID

Support System:

ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description:

HORIZONTAL PANEL JOINT DETAIL(SECTION VIEW)

 Scale @ A3 : 1:2
 Rev. : NOV 2022


 System # : TERRA-V-EN03-HOR-SF3
 Detail # : 11


ENCLAD™ RAINSCREEN SYSTEMS



158 CENTRAL PARK DRIVE, HENDERSON, AUCKLAND 0610 NEW ZEALAND



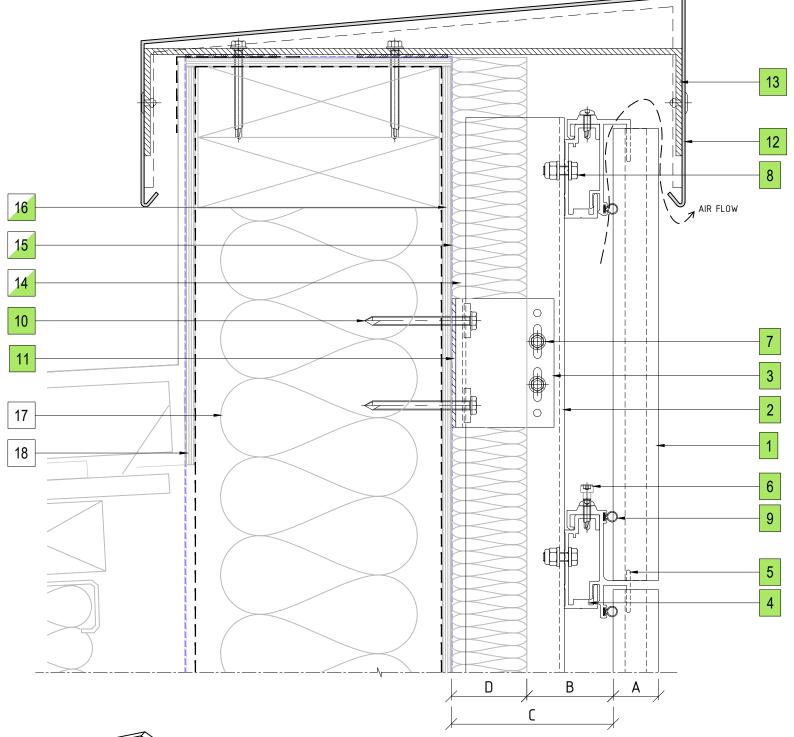

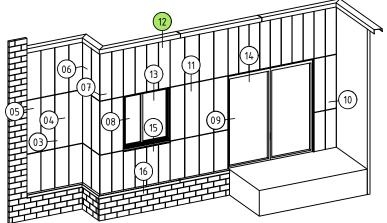

PARAPET FLASHING DETAIL ENCLADTM TERRACOTTA TILES

PART OF THE THERMOSASH GROUP COMPANIES :





COPYRIGHT: THESE DESIGNS, DETAILS AND/OR SPECIFICATIONS AND THE COPYRIGHT THEREIN, REMAIN THE PROPERTY OF THERMOSASH COMMERCIAL LIMITED

DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VARY DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR RENSURING DETAILS SATISTY ALL NEW ZEALAND BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR RENSURING BUILDING WARDS. STRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND NAZE KEGULATIONS. REFER TO HERMOSASH WEESTER FOR FULL TERMS AND CONDITIONS.

LEGEND		
А	ENCLAD [™] TERRACOTTA TILES	
В	52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)	
С	* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION	
D	* 50mm INSULATION (OPTION BY INSITE) FIRE STOP (OPTION BY INSITE)	
*	OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 100mm THICK INSULATION	
·	PARTS LIST	
1	ENCLAD [™] TERRACOTTA TILE	
2	ENCLAD EN01 ALUMINIUM SUPPORT PROFILE	
3	ENCLAD EN01 ALUMINIUM HELPING HAND BRACKET	
4	ENCLAD EN01 ALUMINIUM HORIZONTAL RAIL	
5	ENCLAD EN01 ALUMINIUM TILE CLIP	
6	ENCLAD HEIGHT ADJUST DEAD LOAD FIXING BOLT FIXING SCREW TO LOCK OFF (STAINLESS STEEL)	
7	ENCLAD BRACKET TO RAIL FIXING (STAINLESS STEEL)	
8	ENCLAD RAIL TO RAIL FIXING (STAINLESS STEEL)	
9	ENCLAD GASKET	
10	ENCLAD HOST STRUCTURAL FIXING (STAINLESS STEEL)	
11	ENCLAD THERMAL ISOLATION PAD	
12	ENCLAD ALUMINIUM FLASHING	
13	ENCLAD ALUMINIUM BRACKET	
14	CAVITY INSULATION (OPTION BY INSITE)	
15	BUILDING WRAP / MEMBRANE (OPTION BY INSITE)	
16	RIGID AIR BARRIER / SHEATHING BOARD (OPTION BY INSITE)	
17	WALL INSULATION (BY OTHERS)	
18	PLASTER BOARD (BY OTHERS)	

Cladding Type:

ENCLAD™ TERRACOTTA TILES - VERTICALLY LAID

Support System:

ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description:

PARAPET FLASHING DETAIL (SECTION VIEW)

 Scale @ A3 : 1:2.5
 Rev. : NOV 2022

 System # :
 Detail # :

TERRA-V-EN03-HOR-SF3

ENCLAD™ RAINSCREEN SYSTEMS







COPYRIGHT : THESE DESIGNS, DETAILS AND/OR SPECIFICATIONS AND THE COPYRIGHT THEREIN, REMAIN THE PROPERT OF THERMOSASH COMMERCIAL LIMITED

DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VARY DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR RESURRING DETAILS SATISTY ALL NEW ZELANDA BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR RESURRING BUILDING WAPS, FIRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND NEZE REGULATIONS. REPER TO THERMOSASH WEBSITE FOR FULL TERMS AND CONDITIONS.

	LEGEND
А	ENCLAD™ TERRACOTTA TILES
В	52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)
С	* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION
D	* 50mm INSULATION (OPTION BY INSITE) FIRE STOP (OPTION BY INSITE)
*	OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 100mm THICK INSULATION
•	PARTS LIST
1	ENCLAD™ TERRACOTTA TILE
2	ENCLAD EN01 ALUMINIUM SUPPORT PROFILE
3	ENCLAD EN01 ALUMINIUM HELPING HAND BRACKET
4	ENCLAD EN01 ALUMINIUM HORIZONTAL RAIL
5	ENCLAD EN01 ALUMINIUM TILE CLIP
6	ENCLAD HEIGHT ADJUST DEAD LOAD FIXING BOLT FIXING SCREW TO LOCK OFF (STAINLESS STEEL)
7	ENCLAD BRACKET TO RAIL FIXING (STAINLESS STEEL)
8	ENCLAD RAIL TO RAIL FIXING (STAINLESS STEEL)
9	ENCLAD GASKET
10	ENCLAD HOST STRUCTURAL FIXING (STAINLESS STEEL)
11	ENCLAD THERMAL ISOLATION PAD
12	ENCLAD ALUMINIUM FLASHING
13	ENCLAD ALUMINIUM CLOSURE
14	CAVITY INSULATION (OPTION BY INSITE)
15	BUILDING WRAP / MEMBRANE (OPTION BY INSITE)
16	RIGID AIR BARRIER / SHEATHING BOARD (OPTION BY INSITE)
17	ALUMINIUM DOORS, WINDOWS & REVEALS (OPTION BY INSITE)
18	WALL INSULATION (BY OTHERS)
19	PLASTER BOARD (BY OTHERS)
\neg	

Cladding Type:

ENCLAD™ TERRACOTTA TILES - VERTICALLY LAID

Support System:

ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description:

WINDOW HEAD DETAIL (SECTION VIEW)

Scale @ A3 : 1:2	Rev.: NOV 2022
System #:	Detail # :
TERRA-V-EN03-HOR-SF3	13

ENCLAD™ RAINSCREEN SYSTEMS







COPYRIGHT: THESE DESIGNS, DETAILS AND/OR SPECIFICATIONS AND THE COPYRIGHT THEREIN, REMAIN THE PROPERTY OF THERMOSASH COMMERCIAL LIMITED.

DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VARY DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR RESURRING DETAILS SATIETY ALL NEW ZEALAND BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR RESURING BUILDING WARDS. FIRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND NAZE REGULATIONS. EIGER TO THERMOSASH WEBSITE OF ROLL TERMS AND CONDITIONS.

LEGEND	
А	ENCLAD™ TERRACOTTA TILES
В	52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)
С	* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION
D	* 50mm INSULATION (OPTION BY INSITE) FIRE STOP (OPTION BY INSITE)
*	OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 100mm THICK INSULATION
	PARTS LIST
1	ENCLAD™ TERRACOTTA TILE
2	ENCLAD EN01 ALUMINIUM SUPPORT PROFILE
3	ENCLAD EN01 ALUMINIUM HELPING HAND BRACKET
4	ENCLAD EN01 ALUMINIUM HORIZONTAL RAIL
5	ENCLAD EN01 ALUMINIUM TILE CLIP
6	ENCLAD HEIGHT ADJUST DEAD LOAD FIXING BOLT FIXING SCREW TO LOCK OFF (STAINLESS STEEL)
7	ENCLAD BRACKET TO RAIL FIXING (STAINLESS STEEL)
8	ENCLAD RAIL TO RAIL FIXING (STAINLESS STEEL)
9	ENCLAD GASKET
10	ENCLAD HOST STRUCTURAL FIXING (STAINLESS STEEL)
11	ENCLAD THERMAL ISOLATION PAD
12	ENCLAD ALUMINIUM FLASHING
13	ENCLAD ALUMINIUM CLOSURE
14	CAVITY INSULATION (OPTION BY INSITE)
15	BUILDING WRAP / MEMBRANE (OPTION BY INSITE)
16	RIGID AIR BARRIER / SHEATHING BOARD (OPTION BY INSITE)
17	ALUMINIUM DOORS, WINDOWS & REVEALS (OPTION BY INSITE)
18	WALL INSULATION (BY OTHERS)
19	PLASTER BOARD (BY OTHERS)
\rightarrow	

Cladding Type:

ENCLAD™ TERRACOTTA TILES - VERTICALLY LAID

Support System:

ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description:
DOOR HEAD DETAIL (SECTION VIEW)

 Scale @ A3 : 1:2
 Rev. : NOV 2022

 System # :
 Detail # :

 TERRA-V-EN03-HOR-SF3
 14

ENCLAD™ RAINSCREEN SYSTEMS



158 CENTRAL PARK DRIVE, HENDERSON, AUCKLAND 0610 NEW ZEALAND





DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VARY DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR RESURRING DETAILS SATISTY ALL NEW ZELANDA BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR RESURRING BUILDING WAPS, FIRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND NEZE REGULATIONS. REPER TO THERMOSASH WEBSITE FOR FULL TERMS AND CONDITIONS.

LEGEND
ENCLAD [™] TERRACOTTA TILES
52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)
* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION
* 50mm insulation (option by insite) Fire stop (option by insite)
OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 100mm THICK INSULATION
PARTS LIST
ENCLAD [™] TERRACOTTA TILE
ENCLAD EN01 ALUMINIUM SUPPORT PROFILE
ENCLAD EN01 ALUMINIUM HELPING HAND BRACKET
ENCLAD EN01 ALUMINIUM HORIZONTAL RAIL
ENCLAD EN01 ALUMINIUM TILE CLIP
ENCLAD HEIGHT ADJUST DEAD LOAD FIXING BOLT FIXING SCREW TO LOCK OFF (STAINLESS STEEL)
ENCLAD BRACKET TO RAIL FIXING (STAINLESS STEEL)
ENCLAD RAIL TO RAIL FIXING (STAINLESS STEEL)
ENCLAD GASKET
ENCLAD HOST STRUCTURAL FIXING (STAINLESS STEEL)
ENCLAD THERMAL ISOLATION PAD
ENCLAD ALUMINIUM FLASHING
ENCLAD ALUMINIUM BRACKET
CAVITY INSULATION (OPTION BY INSITE)
BUILDING WRAP / MEMBRANE (OPTION BY INSITE)
RIGID AIR BARRIER / SHEATHING BOARD (OPTION BY INSITE)
ALUMINIUM DOORS, WINDOWS & REVEALS (OPTION BY INSITE)
WALL INSULATION (BY OTHERS)
PLASTER BOARD (BY OTHERS)

Cladding Type:

ENCLAD™ TERRACOTTA TILES -VERTICALLY LAID

Support System:


ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description: WINDOW SILL DETAIL (SECTION VIEW)


Scale @ A3: 1:2	Rev.: NOV 2022
System # :	Detail # :
TERRA-V-EN03-HOR-SF3	15


ENCLAD™ RAINSCREEN SYSTEMS



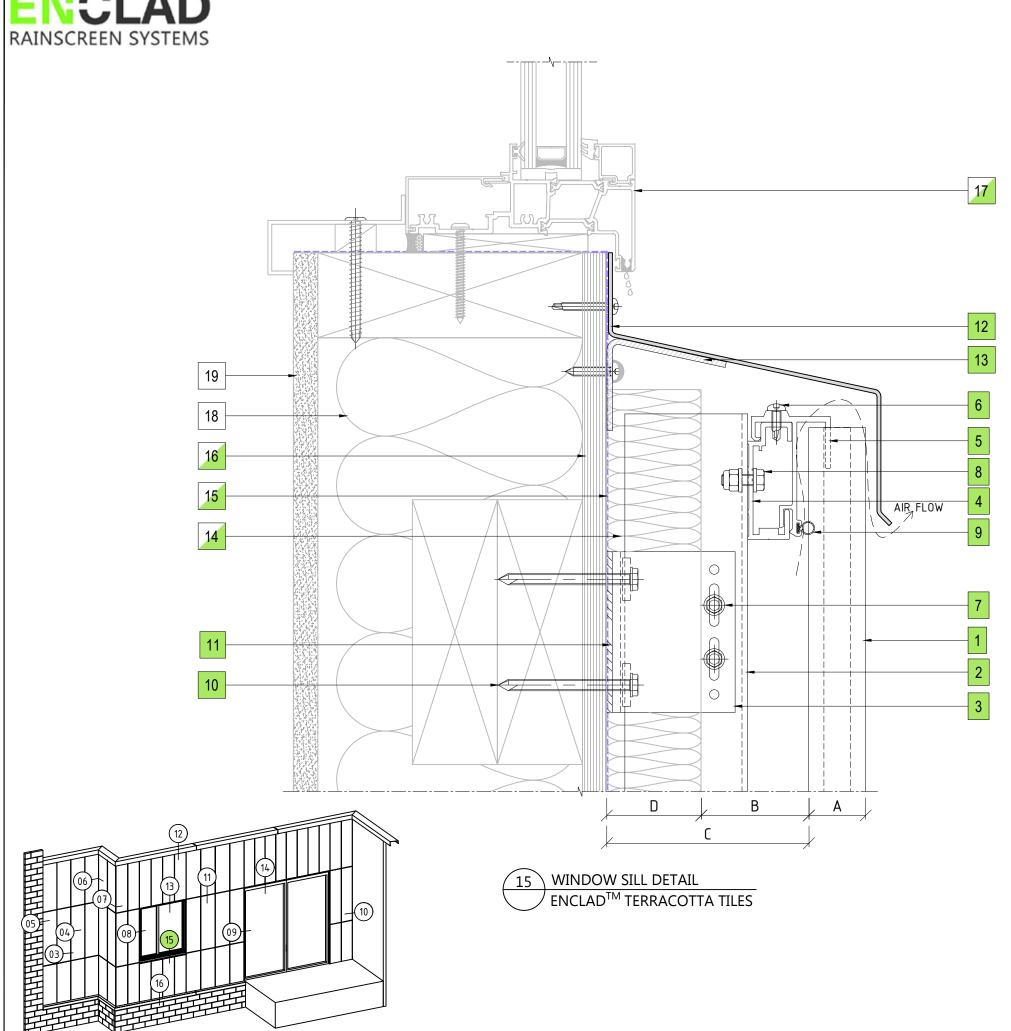



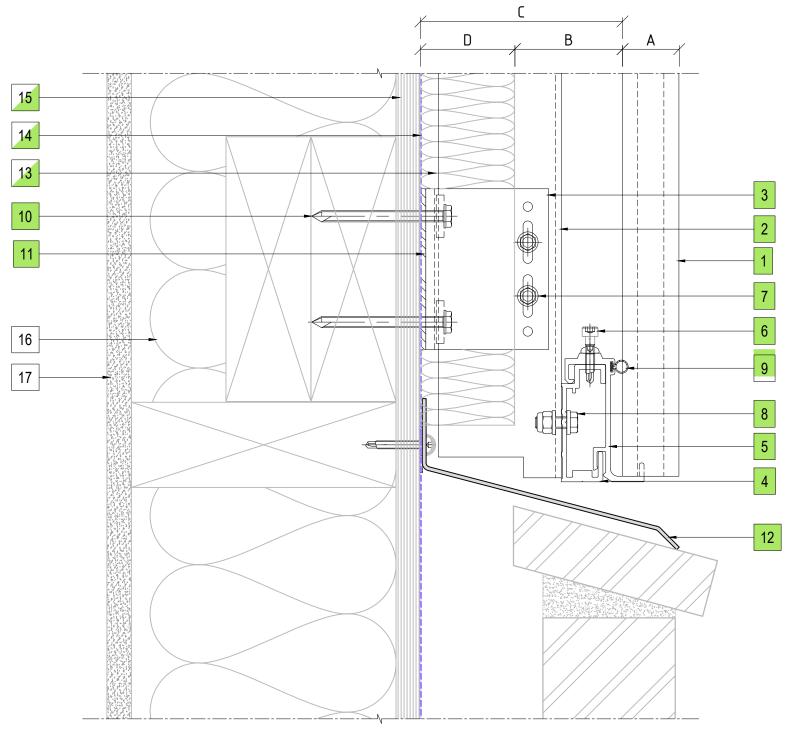

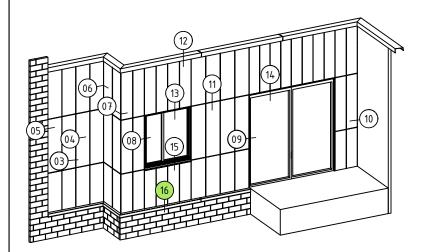

BRICKWALL AT BASE DRIP DETAIL ENCLADTM TERRACOTTA TILES

PART OF THE THERMOSASH GROUP COMPANIES :





COPYRIGHT: THESE DESIGNS, DETAILS AND/OR SPECIFICATIONS AND THE COPYRIGHT THEREIN, REMAIN THE PROPERTY OF THERMOSASH COMMERCIAL LIMITED.

DISCLAIMER: THESE DETAILS ARE PROVIDED FOR INDICATIVE PURPOSES ONLY. CONSTRUCTION/SYSTEM DETAILS CAN VARY DEPENDING ON PROJECT SPECIFIC SPECIFICATION AND ENGINEERING REQUIREMENTS. THE DESIGNER IS RESPONSIBLE FOR RENSURING DETAILS SATISTY ALL INVEXTEALAND BUILDING CODE CLAUSES. THE DESIGNER IS RESPONSIBLE FOR RENSURING BUILDING WARPS, BIRESTOPS AND INSULATION/SPECIFICATION COMPLY WITH MANUFACTURERS RECOMMENDATIONS AND NZEC REQUIRED.

LEGEND		
А	ENCLAD TM TERRACOTTA TILES	
В	52mm - 57mm NOMINAL VENTILATION ZONE (AIR GAP)	
С	* 107mm SYSTEM CAVITY TO ACCOMMODATE 50mm THICK INSULATION	
D	* 50mm INSULATION (OPTION BY INSITE) FIRE STOP (OPTION BY INSITE)	
*	OTHER OPTIONS AVAILABLE (PROJECT SPECIFIC) 132mm SYSTEM CAVITY FOR 75mm THICK INSULATION 152mm SYSTEM CAVITY FOR 100mm THICK INSULATION	
	PARTS LIST	
1	ENCLAD TM TERRACOTTA TILE	
2	ENCLAD EN01 ALUMINIUM SUPPORT PROFILE	
3	ENCLAD EN01 ALUMINIUM HELPING HAND BRACKET	
4	ENCLAD EN01 ALUMINIUM HORIZONTAL RAIL	
5	ENCLAD EN01 ALUMINIUM TILE CLIP	
6	ENCLAD HEIGHT ADJUST DEAD LOAD FIXING BOLT FIXING SCREW TO LOCK OFF (STAINLESS STEEL)	
7	ENCLAD BRACKET TO RAIL FIXING (STAINLESS STEEL)	
8	ENCLAD RAIL TO RAIL FIXING (STAINLESS STEEL)	
9	ENCLAD GASKET	
10	ENCLAD HOST STRUCTURAL FIXING (STAINLESS STEEL)	
11	ENCLAD THERMAL ISOLATION PAD	
12	ENCLAD ALUMINIUM FLASHING	
13	CAVITY INSULATION (OPTION BY INSITE)	
14	BUILDING WRAP / MEMBRANE (OPTION BY INSITE)	
15	RIGID AIR BARRIER / SHEATHING BOARD (OPTION BY INSITE)	
16	WALL INSULATION (BY OTHERS)	
17	PLASTER BOARD (BY OTHERS)	

Cladding Type:

ENCLAD™ TERRACOTTA TILES - VERTICALLY LAID

Support System:

ENCLAD™ EN03 - HOOK ON SECRET FIXED

Detail Description:

BRICKWALL AT BASE DRIP DETAIL (SECTION VIEW)

Scale @ A3: 1:2	Rev.: NOV 2022
System #:	Detail # :
TERRA-V-EN03-HOR-SF3	16

ENCLAD™ RAINSCREEN SYSTEMS



158 CENTRAL PARK DRIVE, HENDERSON, AUCKLAND 0610 NEW ZEALAND P: +64 9 444 4944

www.thermosash.co.nz