


NOTES:  
 1) DRAWING TO BE USED IN CONJUNCTION WITH 'MASTERSPEC' (4521)  
 2) WINDOW SYSTEMS REQUIRE SPECIFIC DESIGN DEPENDING ON SPANS, WIND-LOADS, CLADDING SPECIFIED, ETC.  
 3) INTERNAL REINFORCEMENT OPTIONS AVAILABLE  
 4) DUCTS TO BACK OF LOUVRES (BOOT CONNECTION OPTION AVAILABLE)

GLAZING: GLASS THICKNESS TO SUIT REQUIREMENTS  
 HARDWARE: VARIOUS STANDARD HARDWARE OPTIONS AVAILABLE (OR CALL TO DISCUSS SPECIFIC COMPONENTS)  
 FINISHES: POWDER-COAT / ANODISED / PVF<sup>2</sup>


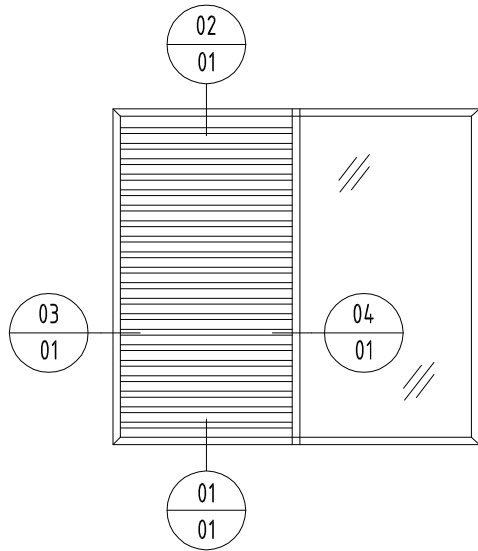


02 01 HEAD 1:2

01 01 SILL 1:2

03 01 JAMB 1:2

04 01 TRANSOM 1:2

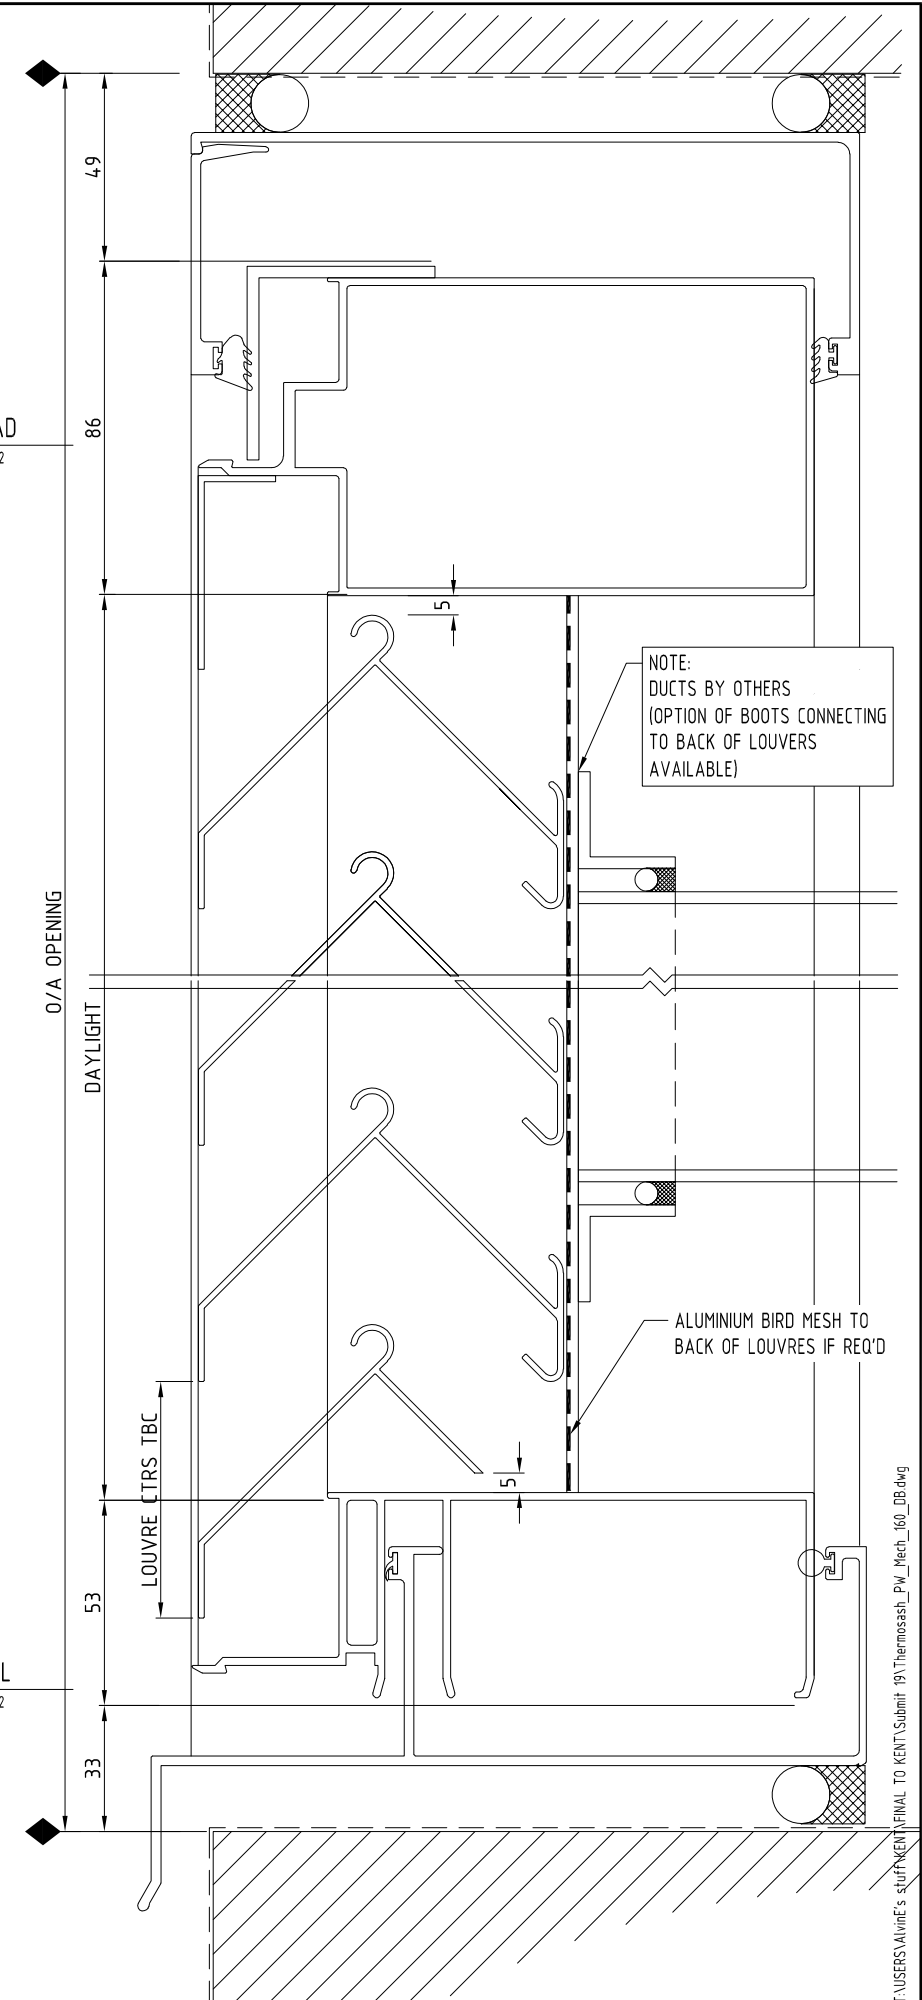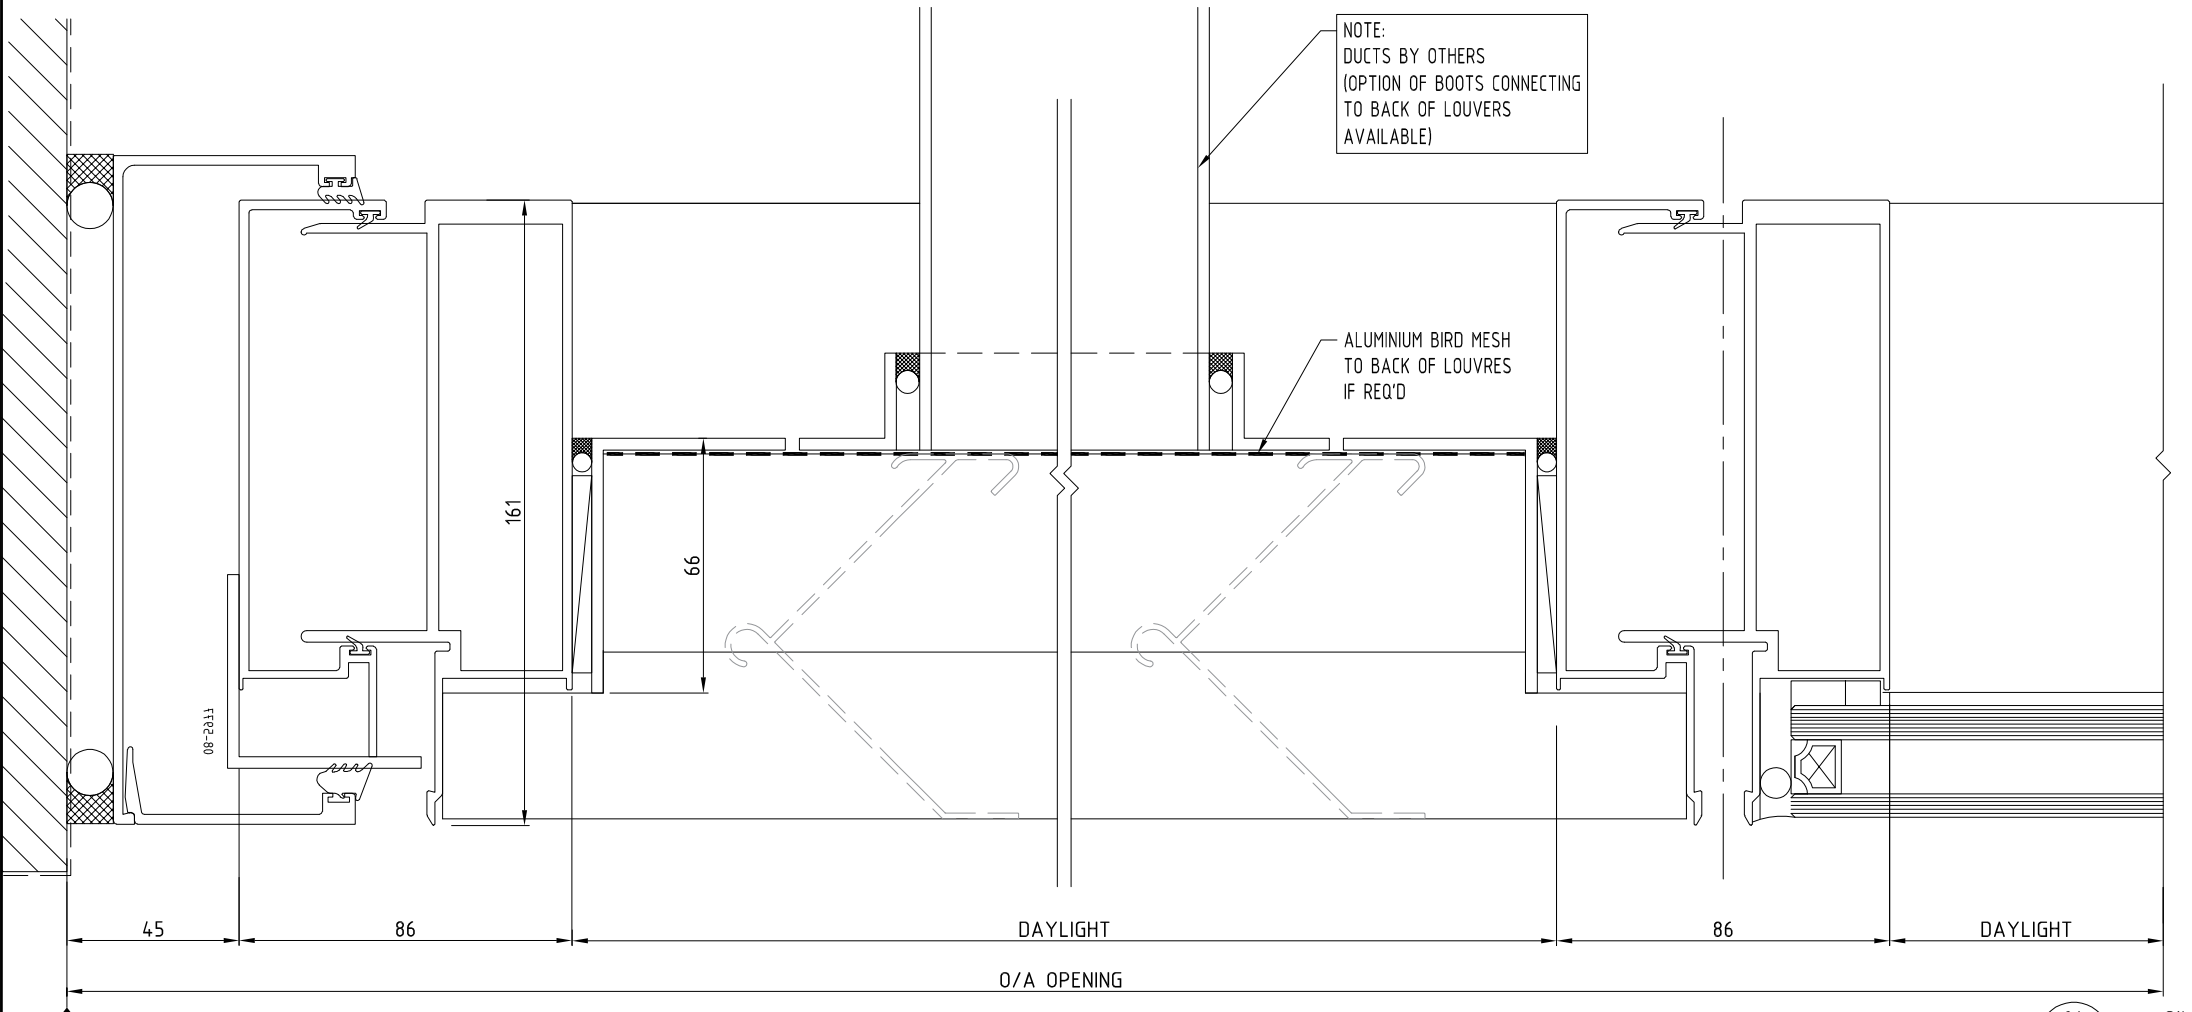

SYSTEM : PW1000 WITH DOUBLE BANK LOUVRE

TYPE :

SCALE: 1:2 @ A3

DATE: Jul-21

PAGE: Thermosash\_Mech\_160\_DB

www.thermosash.co.nz ~AUCKLAND: (09)444-4944 ~WELLINGTON: (04)939-4500 ~CHRISTCHURCH: (03)348-4004



T:\USERS\alvire's\_stuff\KENT\FINAL TO KENT\Submit 19\Thermosash\_PW\_Mech\_160\_DB.dwg