
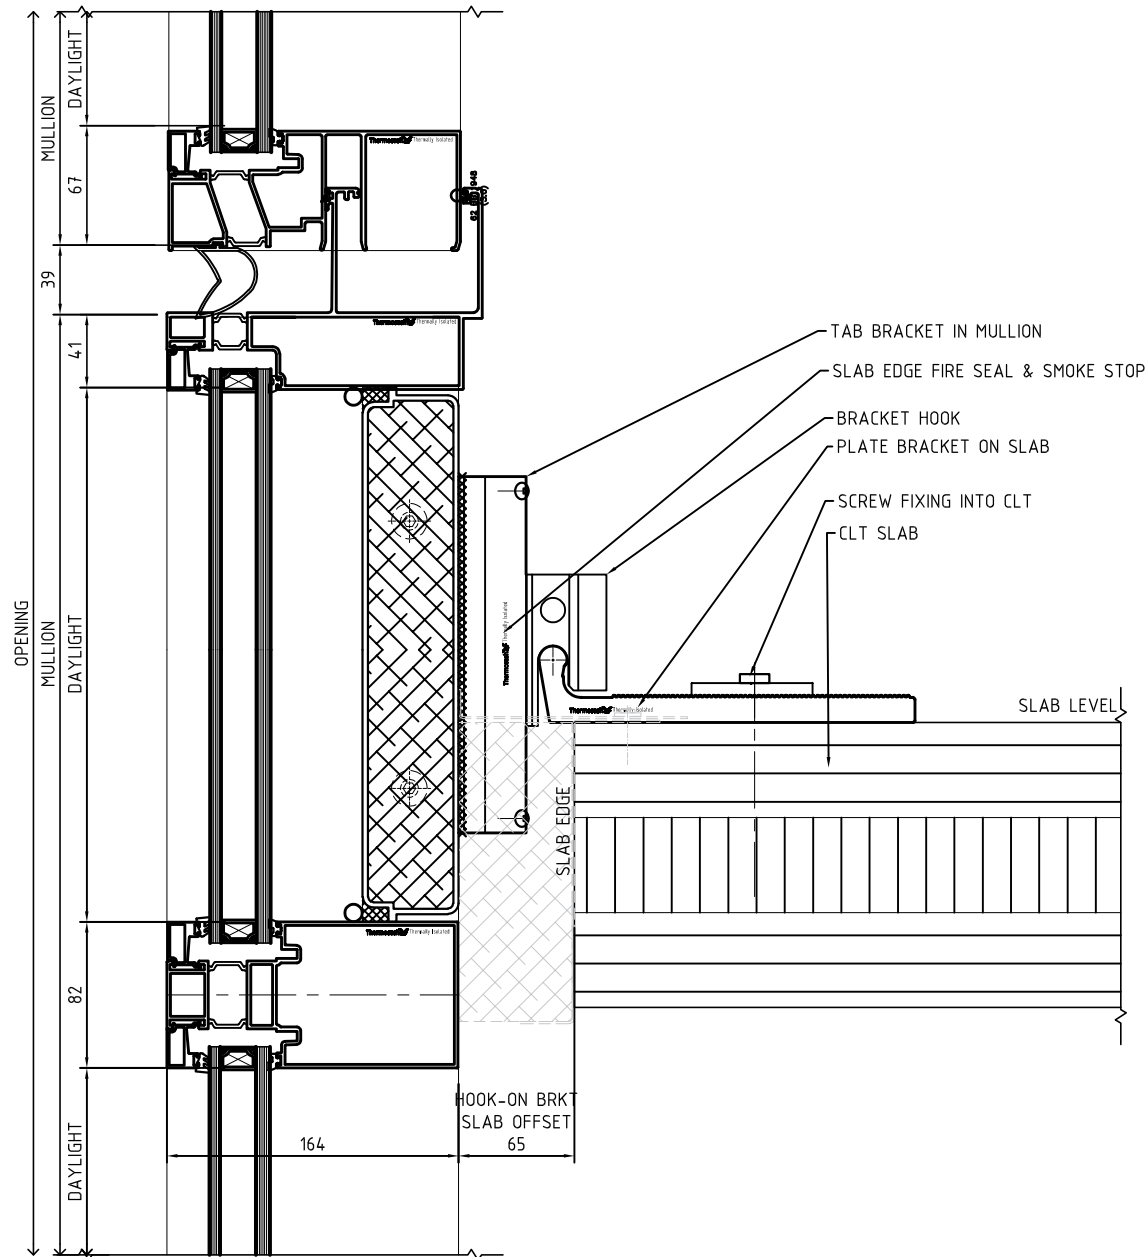


NOTES:
 1) DRAWING TO BE USED IN CONJUNCTION WITH 'MASTERSPEC' (4211)
 2) WINDOW SYSTEMS REQUIRE SPECIFIC DESIGN DEPENDING ON SPANS, WIND-LOADS, BUILDING CONDITIONS, ETC.
 3) INSIDE GLAZE, INTERNAL REINFORCEMENT AND SEISMIC FRAME OPTIONS AVAILABLE

GLAZING: GLASS THICKNESS TO SUIT REQUIREMENTS
 HARDWARE: STANDARD HARDWARE OPTIONS
 FINISHES: POWDER-COAT / ANODISED / PVF²

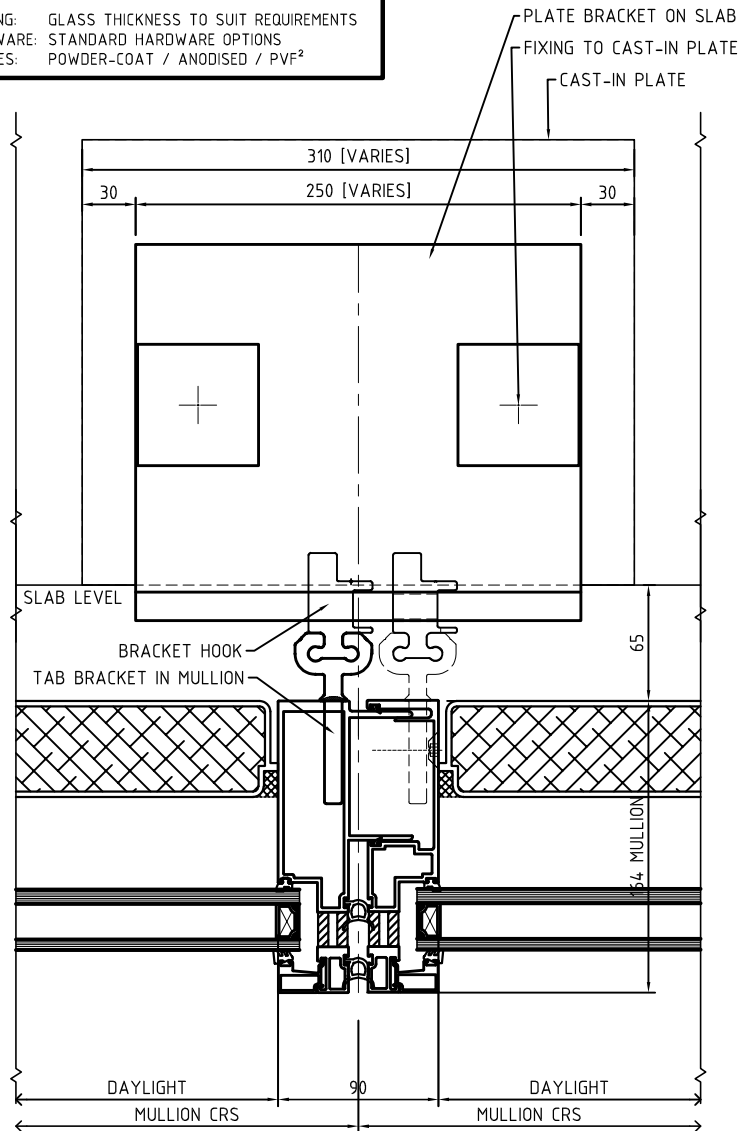

SYSTEM : THERMALLY BROKEN PW1000
 UNITISED HIGH PERFORMANCE
 PANEL SYSTEM

TYPE : 160mm MULLION
 DOUBLE GLAZED (SEISMIC)
 HOOK-ON BRKT ON CLT.SLAB

SCALE: NTS

DATE: Sept-25

PAGE: TB PW400-BK160-2

www.thermosash.co.nz - AUCKLAND: (09)444-4944 - WELLINGTON: (04)939-4500 - CHRISTCHURCH: (03)348-4004

