
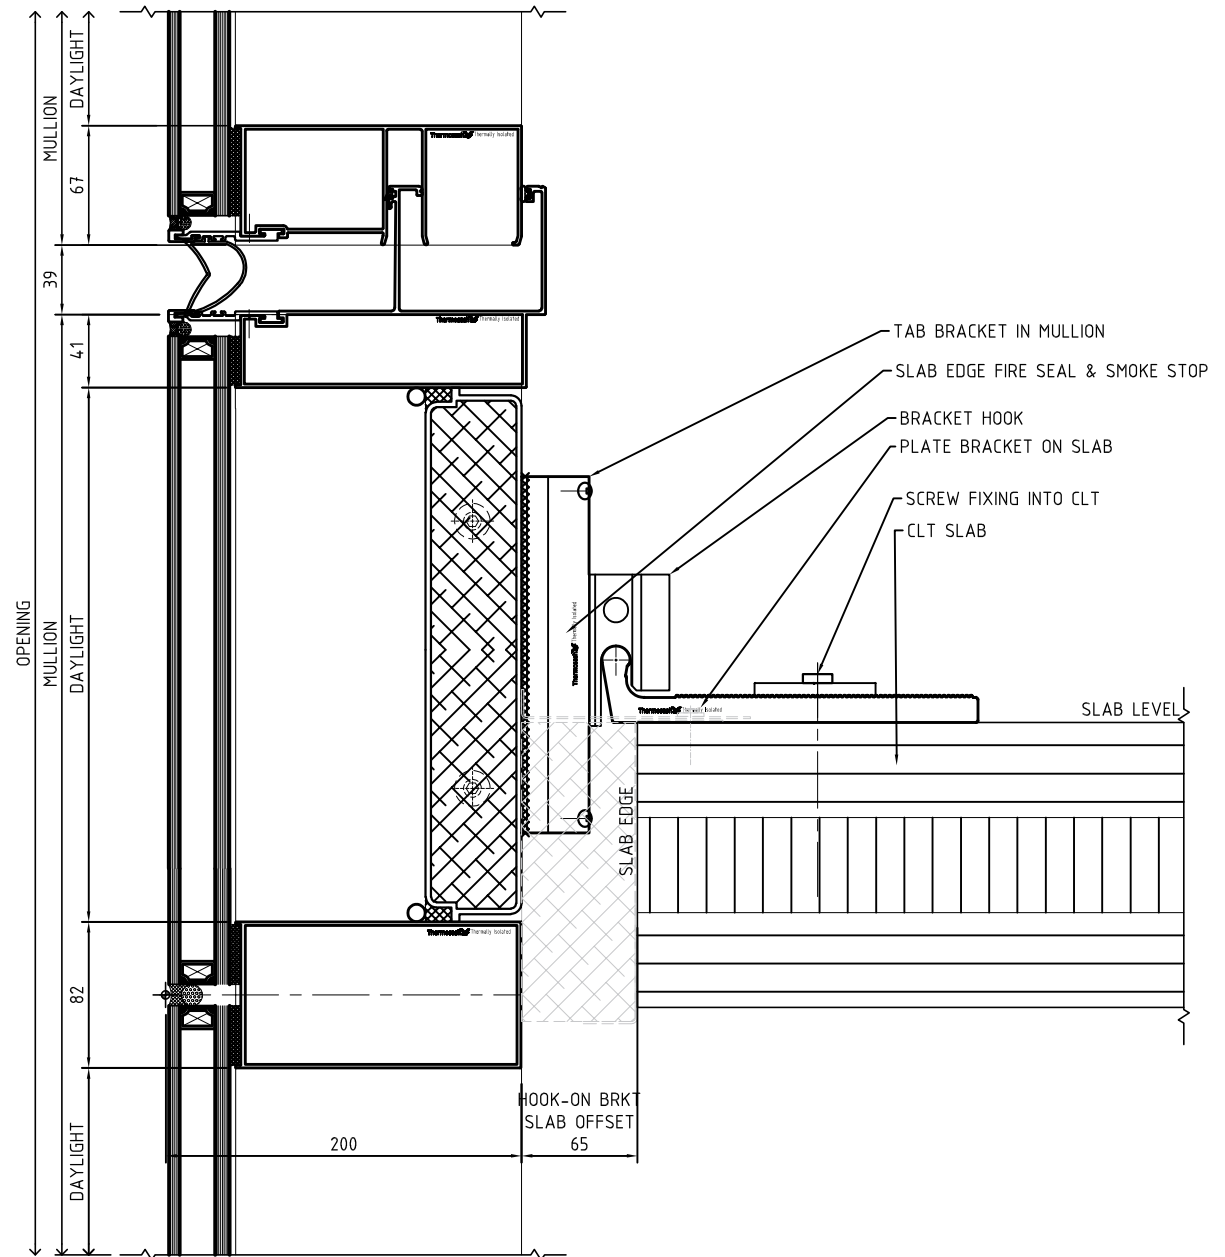


- 1) DRAWING TO BE USED IN CONJUNCTION WITH MASTERSPEC' (4211)
- 2) WINDOW SYSTEMS REQUIRE SPECIFIC DESIGN DEPENDING ON SPANS, WIND-LOADS, BUILDING CONDITIONS, ETC.
- 3) INSIDE GLAZE, INTERNAL REINFORCEMENT AND SEISMIC FRAME OPTIONS AVAILABLE

GLAZING: GLASS THICKNESS TO SUIT REQUIREMENTS
HARDWARE: STANDARD HARDWARE OPTIONS
FINISHES: POWDER-COAT / ANODISED / PVF²

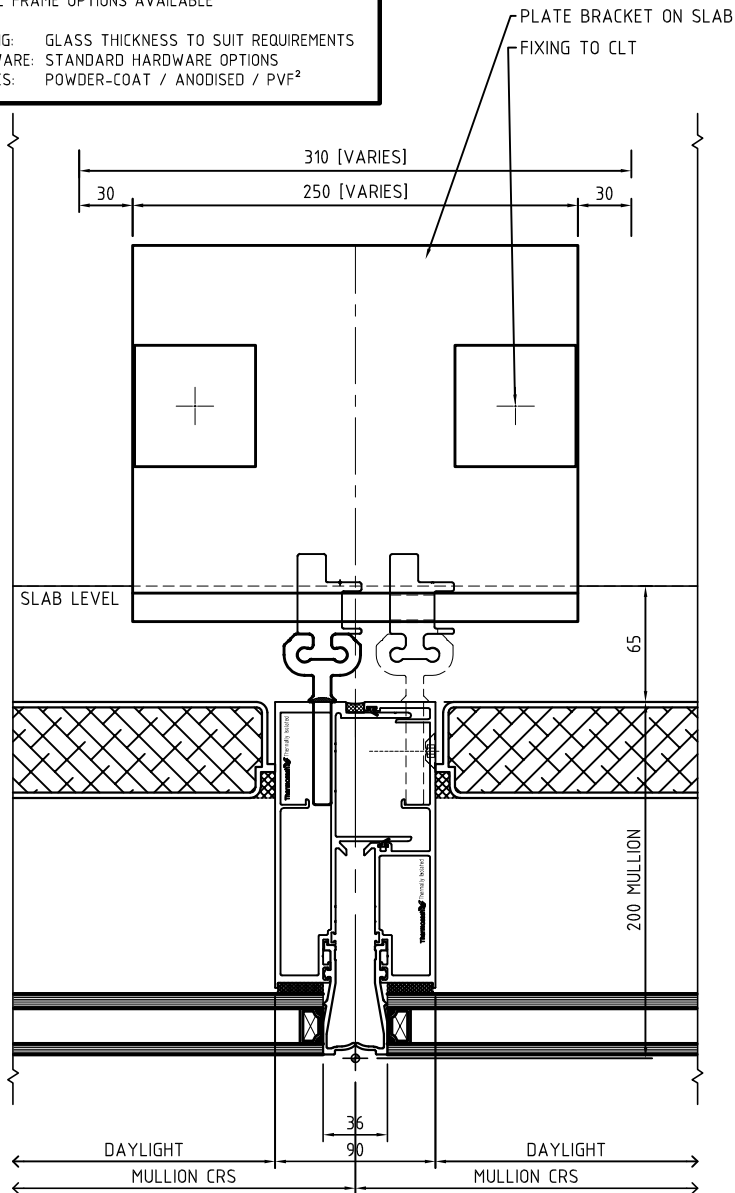

SYSTEM : THERMALLY BROKEN PW1000 UNITISED HIGH PERFORMANCE PANEL SYSTEM	TYPE : 200mm MULLION DOUBLE GLAZED (SEISMIC) HOOK-ON BRKT ON CLT SLAB	SCALE: NTS	DATE: Sept-25	
		PAGE: TB PW1000-BK200-2		
www.thermosash.co.nz ~ AUCKLAND: (09)444-4944 ~ WELLINGTON: (04)939-4500 ~ CHRISTCHURCH: (03)348-4004				