
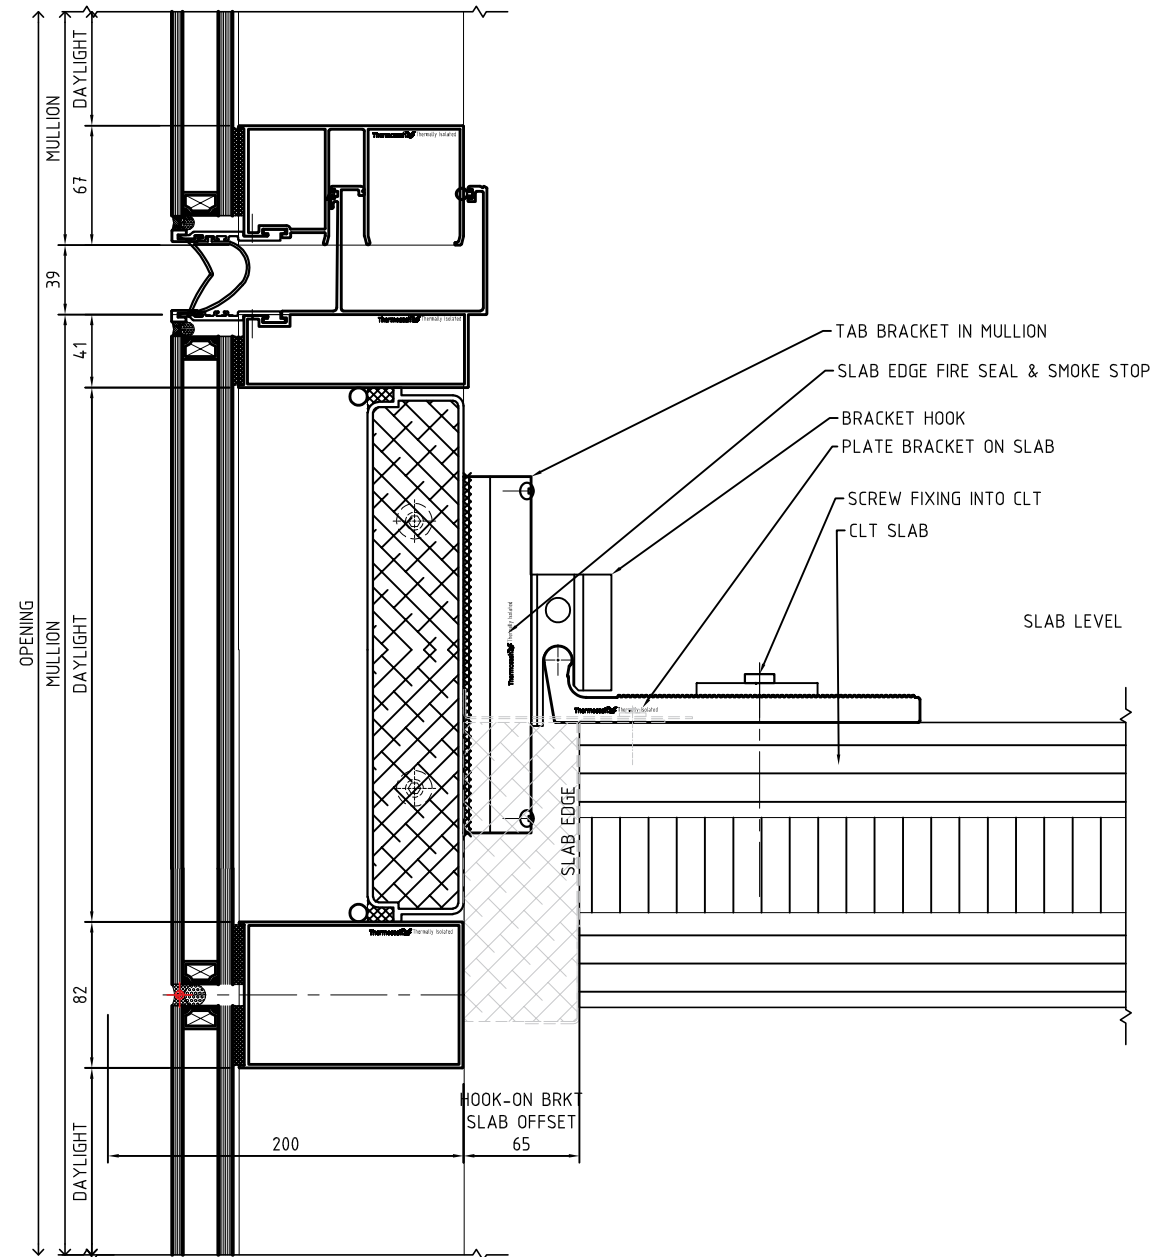


GLAZING: GLASS THICKNESS TO SUIT REQUIREMENTS
HARDWARE: STANDARD HARDWARE OPTIONS
FINISHES: POWDER-COAT / ANODISED / PVF²

PLATE BRACKET ON SLAB
FIXING TO CLT

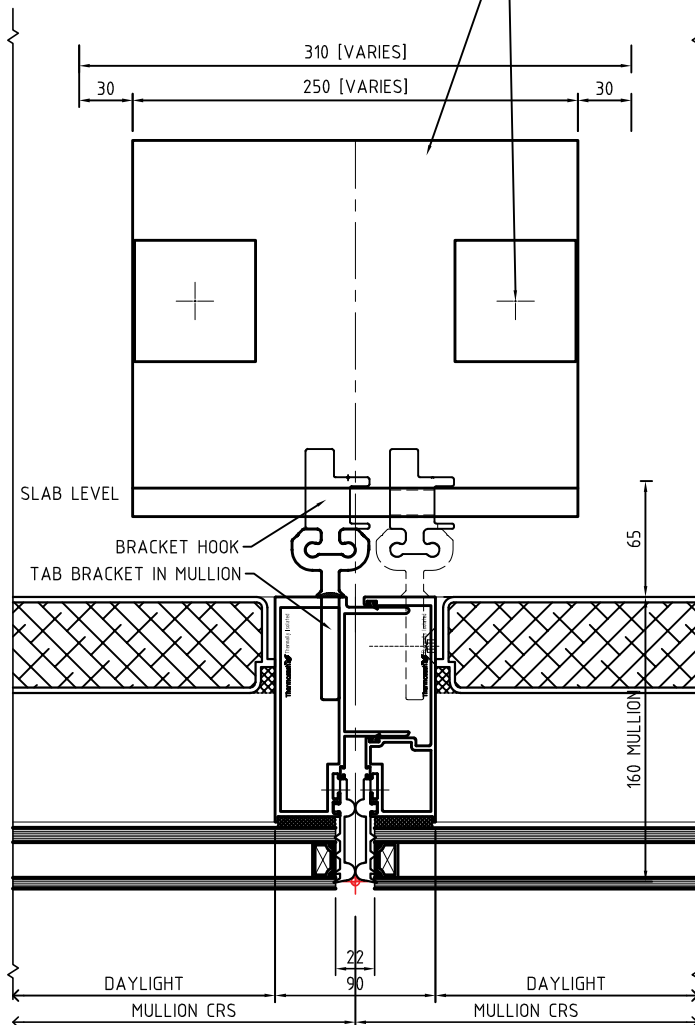

P:\TCL MANUALS\6 WEBSITE DETAILS\TB PW1000-BK160-2.dwg

SYSTEM :	THERMALLY BROKEN PW1000 UNITISED HIGH PERFORMANCE PANEL SYSTEM	TYPE :	160mm MULLION DOUBLE GLAZED (SEISMIC) HOOK-ON BRKT ON CLT.SLAB	SCALE:	DATE:	
				NTS	Sept-25	
				PAGE:		
				TB	PW1000-BK160-2	
www.thermosash.co.nz ~ AUCKLAND: (09)444-4944 ~ WELLINGTON: (04)939-4500 ~ CHRISTCHURCH: (03)348-4004						